

SPECIFICATIONS

Current Rating: 1 AMP
Contact Resistance: 10mΩ/Contact
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

5M H 3 S 2 2 N - 1 X X X X B X U - 0810 - 0 1

1:Single Row

No. of contacts per row(02~50)

G0:Gold Flash

GB:Au 10u"

GF:Au 15u"


GD:Au 30u"

B:Black Insulator

T:Tube W/O Cap

X:Box

RoHS

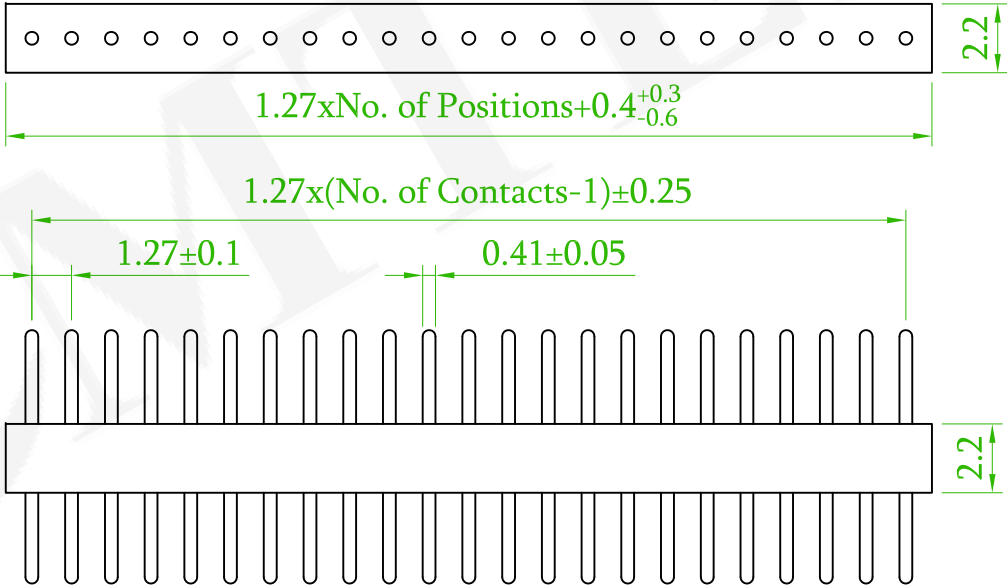

Recommended P.C.B Layout
(PCB BOARD TOLERANCE±0.1)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.27mm MACHINE PIN HEADER SINGLE ROW 180°				頁數 Page	1/1
	品號 PART NO.	5MS3S22N-1XXXXBXU-0810-01				繪圖 DRAWN	Gary 2017/08/03
	圖號 DRAWING NO.	GN003-GA507		版本 REV.	A	核對 CHECKED	Carol 2017/08/03
	客戶品號 CUSTOMER P/N			比例 SCALE	1:1	承認 APPROVED	Jason 2017/08/03
	公差 TOLERANCE	.X ±0.30 .XX ±0.25		.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION
							