

SPECIFICATIONS

Current Rating: 1 AMP

Contact Resistance: 10mΩ Max.

Dielectric Voltage: 1000V AC for one minute

Operation Temperature: -40°C to +105°C


MATERIAL

Insulator: PPS+30%G.F, UL94V-0


Contact Pin: Copper Alloy

ORDER INFORMATION

5	M	H	3	X	2	2	N	-	1	X	X	X	X	B	X	U	-	0000	-	0	1
U:SMT A Type D:SMT B Type				1:Single Row			No. of Contacts Per Row(02~50)			G0:Gold Flash GB:Au 10u" GF:Au 15u" GD:Au 30u"			B:Black Insulator		T:Tube X:Box		RoHS				

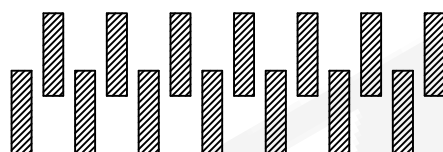


D Type

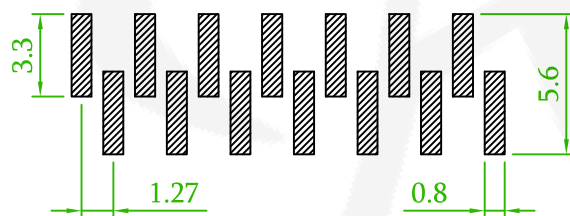


U Type



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

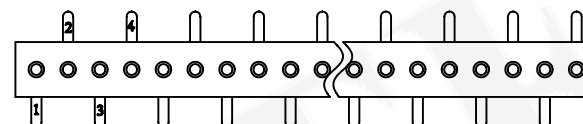

D Type

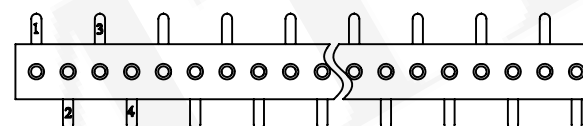

U Type

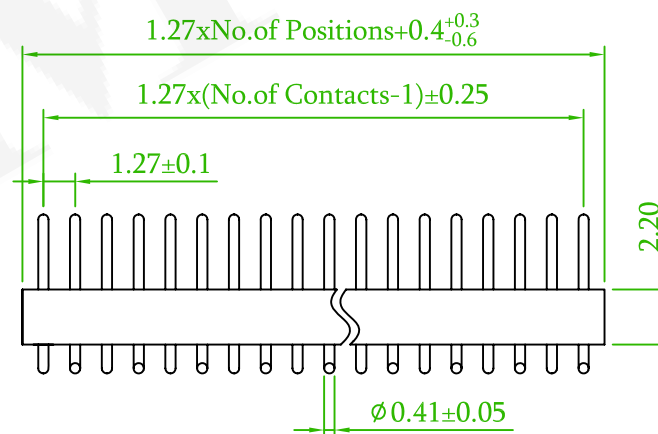

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER 1.27mm				頁數 Page	1/1
	品號 PART NO.	5MH3X22N-1XXXXBXU-0000-01				繪圖 DRAWN	Roy 2017/11/02
	圖號 DRAWING NO.	GN003-RR086		版本 REV.	A	核對 CHECKED	Jason 2017/11/02
	客戶品號 CUSTOMER P/N			比例 SCALE	1:1	承認 APPROVED	Jason 2017/11/02
	公差 TOLERANCE	.X ±0.40 .XX ±0.25		X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION
							