

SPECIFICATIONS

Current Rating: 1 AMP

Contact Resistance: 10mΩ Max.

Dielectric Voltage: 1000V AC for one minute

Operating Temperature: -40°C ~ +105°C

MATERIAL


Insulator: PPS+30%G.F. , UL94V-0

Contact Pin: Copper Alloy

ORDER INFORMATION

5 M I 1 S 3 0 A - 4 X X X X B X U - 1 0 0 B - 0 1

Distance between Rows 4: 0.4"(10.16mm)	No. of Contacts (20, 22, 24, 28, 32)	G0:Gold Flash GB:10u" GF:15u" GD:30u"	B:Black	T:Tube X:Box	RoHS
---	---	--	---------	-----------------	------

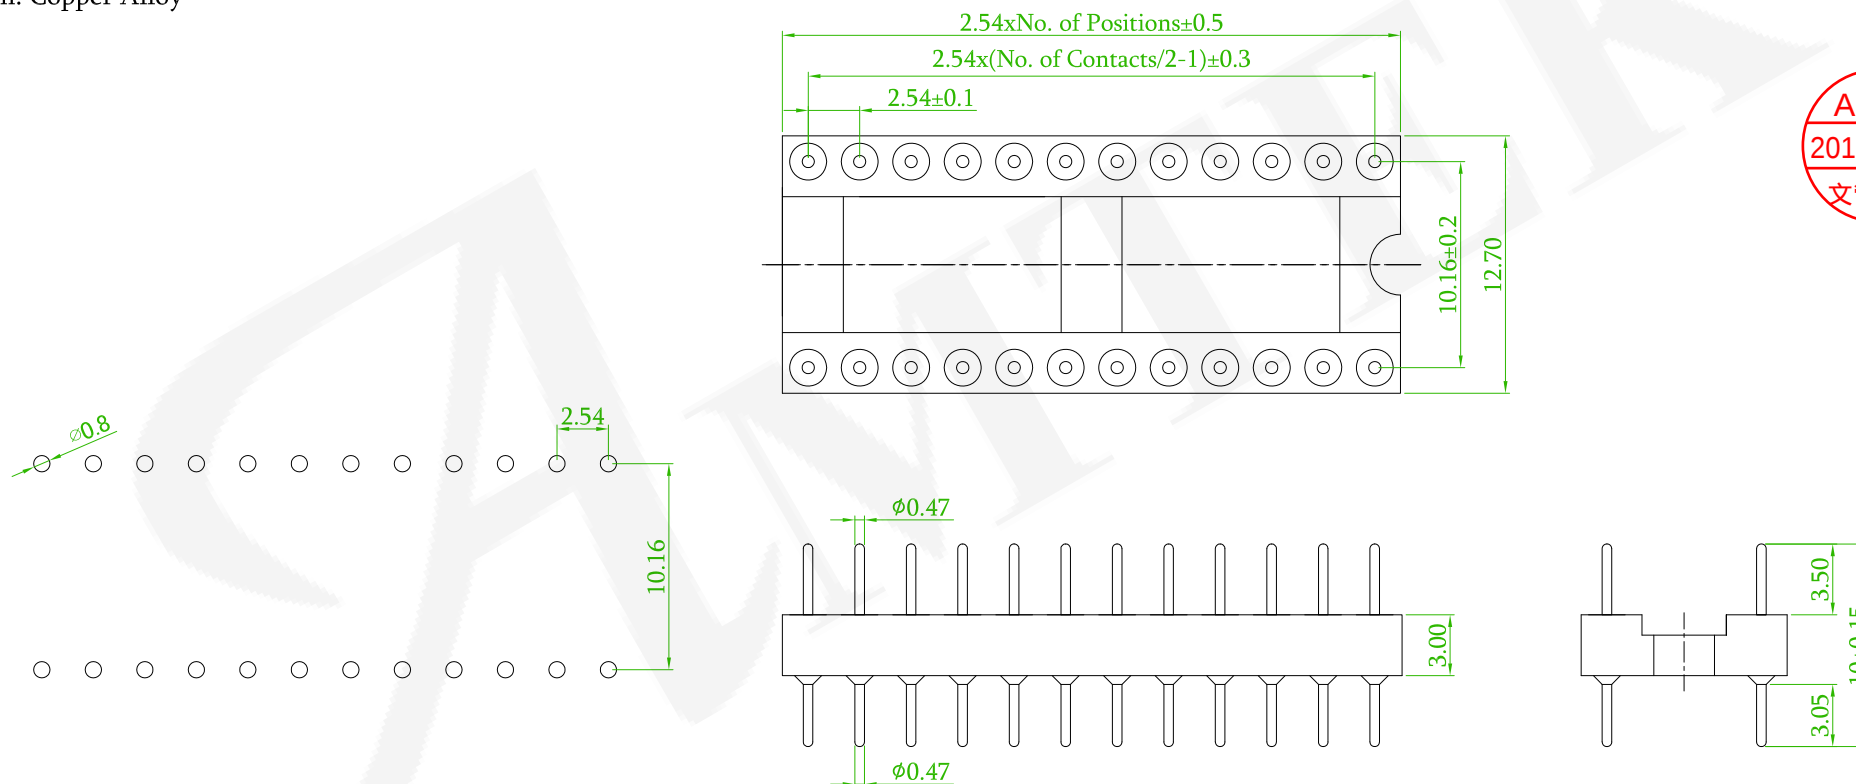

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5MI1S30A-4XXXXBXU-100B-01				繪圖 DRAWN	Gary 2017/11/10
	圖號 DRAWING NO.	GN003-GA749	版本 REV.	A	核對 CHECKED	Jason 2017/11/10	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/11/10	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		