

SPECIFICATIONS


Current Rating:3 AMP
Contact Resistance:≤10mΩ/Contact
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL


Insulator:PPS, UL94V-0
Terminal:Copper Alloy

ORDER INFORMATION



5MS1M30N-2XXXXBXU-0000-01

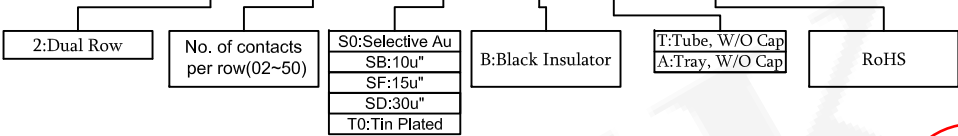

AMTEK 糧德
2019.12.10
Released DCC

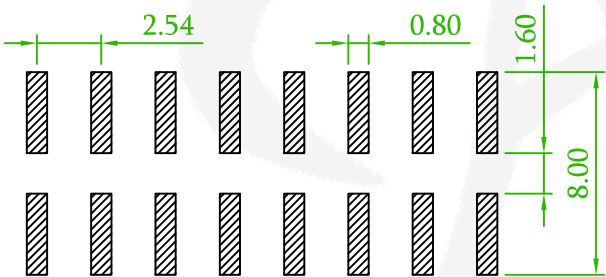

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

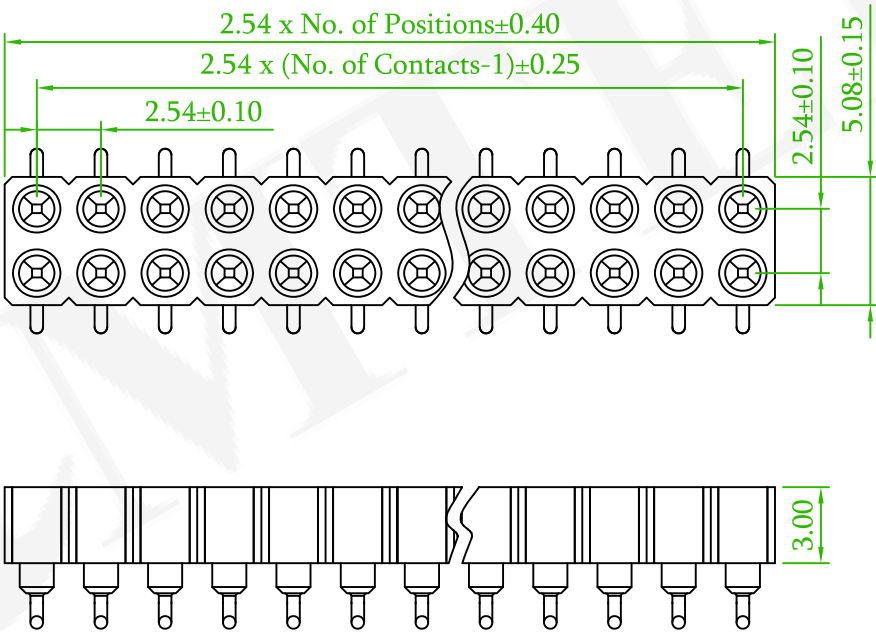

Old Part No.:MS1M30-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm MACHINE PIN SOCKET D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5MS1M30N-2XXXXBXU-0000-01				繪圖 DRAWN	David 2019/12/09
	圖號 DRAWING NO.	GN003-DV544		版本 REV.	A	核對 CHECKED	Josh 2019/12/09
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2019/12/09
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	.X° ±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	