


ORDER INFORMATION

Operation Temperature:-40°C to +105°C


Terminal:Copper Alloy

5 M S 1 M 7 0 N - 2 X X X X B X U - 0000 - 0 1



2: Dual Row
 No. of contacts per row (02~40)
 S0: Selective Au
 SB: 10u"
 SF: 15u"
 SD: 30u"
 T0: Tin Plated
 B: Black Insulator
 T: Tube, W/O Cap
 R: T/R With Cap
 RoHS

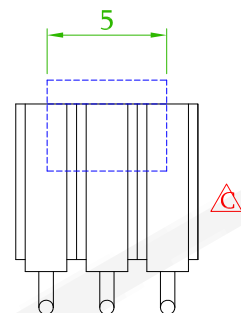A red circular stamp with the text "Amtek" at the top, "2018.06.05" in the middle, and "文管中心" at the bottom.

Cap for 2x1~ 2x3 Pin

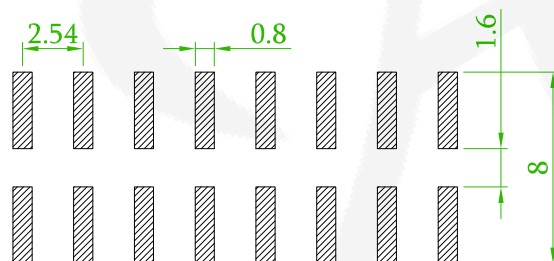

Recommended P.C.B Layout
(PCB BOARD TOLERANCE $\pm$ 0.1)

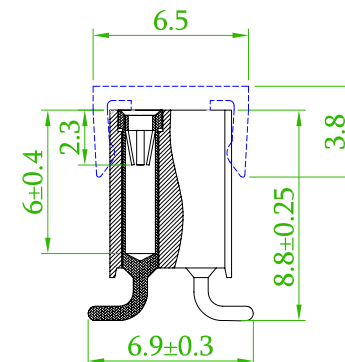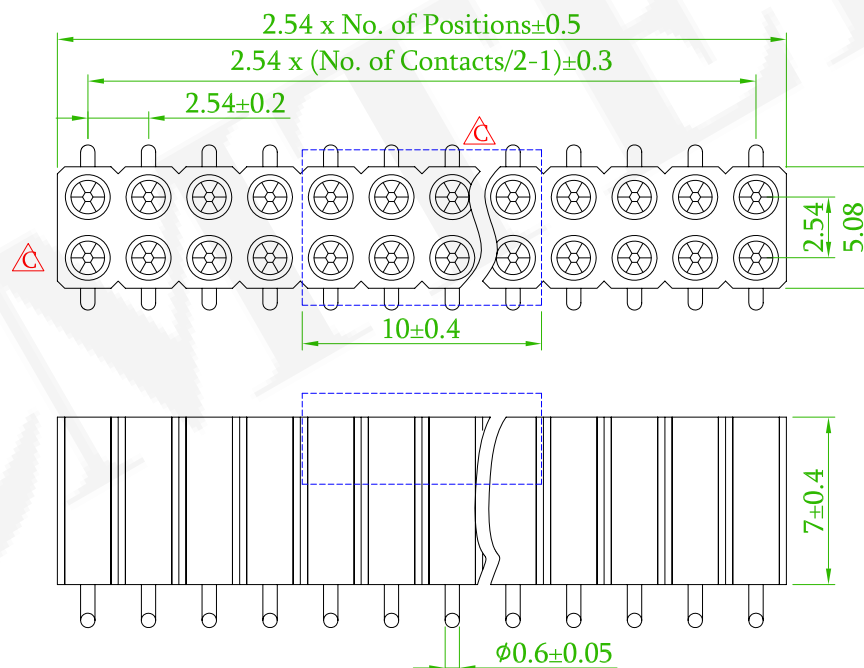

Old Part No.:MS1M70-2XX-U

 x1	QEC NO. : 180601. revise the Options of No. of Contacts: 02-50 -> 02-40.	Gary	2018/06/01
 x3	ECN NO. : 170816. revise the Package Options : H -> R, add the cap, revise the contact point: 4->6.	Gary	2017/08/29
 x1	Add the Package Options : H:T/R W/O Cap	Roy	2017/04/17
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.54mm MACHINE PIN SOCKET D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5MS1M70N-2XXXXBXU-0000-01			繪圖 DRAWN	Jeff 2015/09/16	
圖號 DRAWING NO.	GN003-RL683		版本 REV.	D	核對 CHECKED	Josh 2018/06/01
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/06/01
公差 TOLERANCE	.X ±0.40 .XX ±0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	