

SPECIFICATIONS





Current Rating: 3 AMP
Insulation Resistance: ≥1000MΩ at V=100V.
Contact Resistance: ≤10mΩ/Contact
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: PPS+30%G.F, UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

5MS1R70N-1XXXXBXU-0000-01

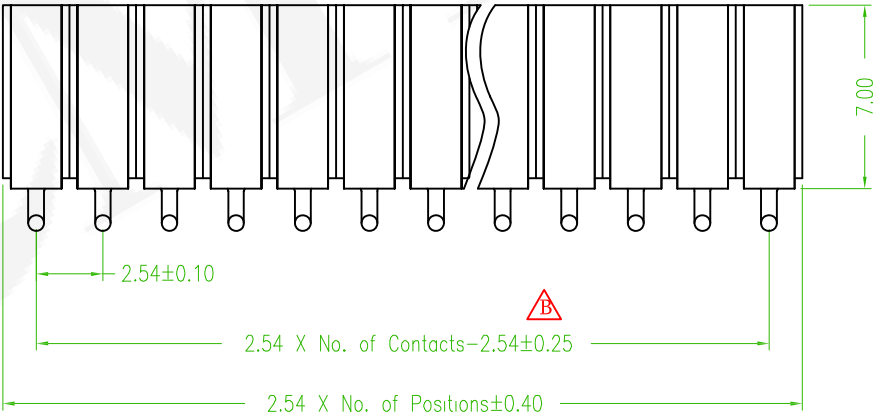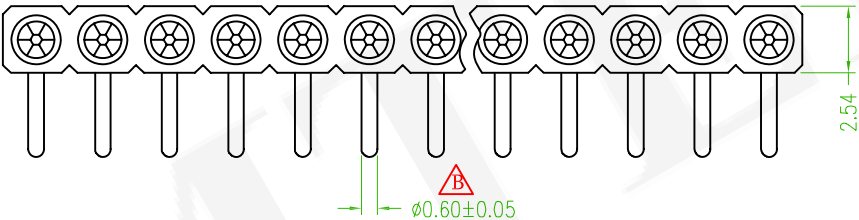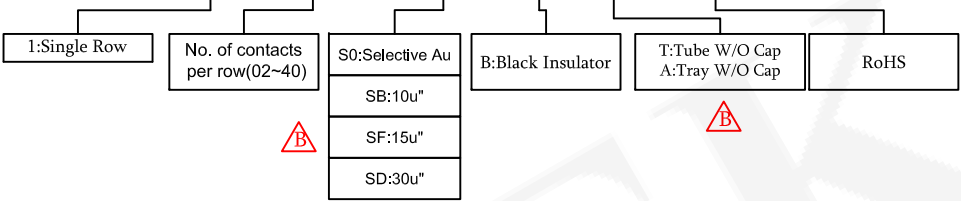

P.C.B Layout
TOLERANCE±0.05

Old Part No.:MS1R70-1XX-U

REV.	ECN/ECN NO.:170519 Revise tolerances, package, insulator.	B	2017/05/22 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN SOCKET RIGHT ANGLE TYPE 2.54mm				頁數 Page	1/1
	品號 PART NO.	5MS1R70N-1XXXXBXU-0000-01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.	GN003-GA399		版本 REV.	B	核對 CHECKED	John 2015/09/16
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	John 2015/09/16
	公差 TOLERANCE	.X ±0.20 .XX ±0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION	
		.X°±3					