






SPECIFICATIONS

Current Rating: 3 AMP
Insulation Resistance: ≥1000MΩ at V=100V.
Contact Resistance: ≤10mΩ/Contact
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: PPS+30%G.F, UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

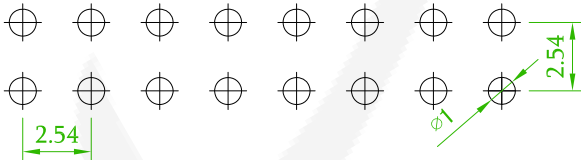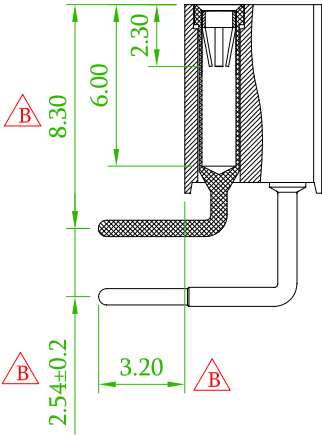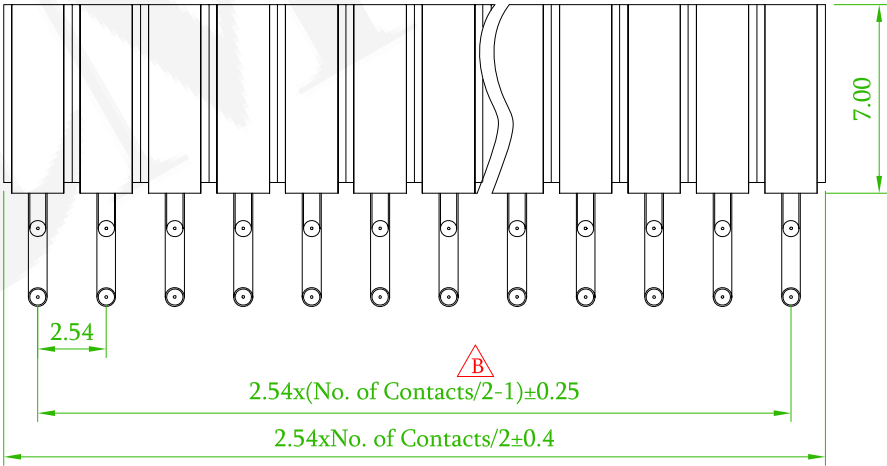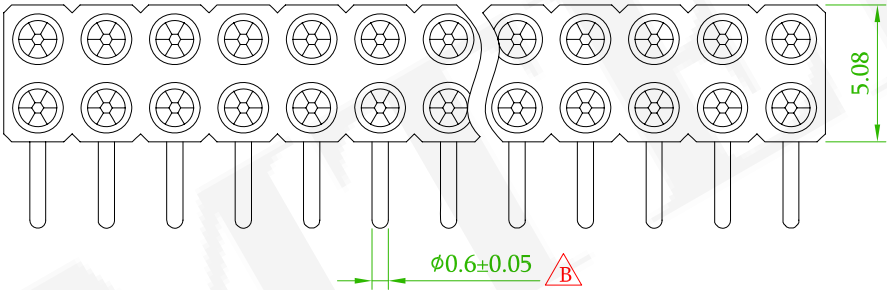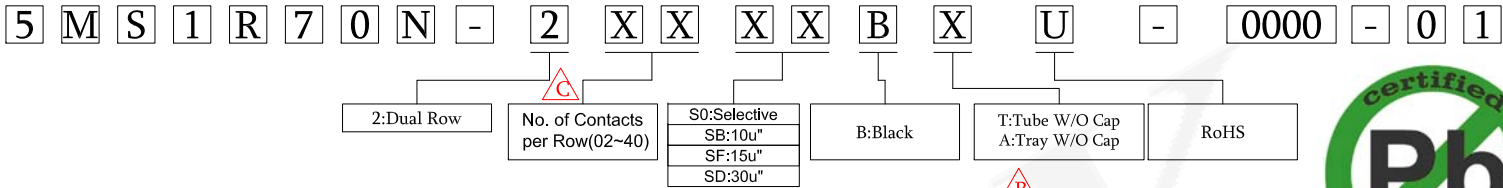

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:MS1R70-2XX-U

REV.	QEC NO.:180601, revise the option of No. of Contacts: 01-40 -> 02-40.	Gary	2018/06/01
	ECN NO.:170520, revise tolerances, package, insulator.	Gary	2017/05/12
	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.54mm MACHINE PIN SOCKET D/R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	5MS1R70N-2XXXXBXU-0000-01				繪圖 DRAWN	Jeff 2015/09/16
圖號 DRAWING NO.	GN003-GA400				核對 CHECKED	Josh 2018/06/01
客戶品號 CUSTOMER P/N					承認 APPROVED	Jason 2018/06/01
公差 TOLERANCE	.X ±0.30 .XX ±0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	