

Specifications

Current Rate:3 AMP

Insulation Resistance: $\geq 1000M\Omega$ at $V=100V$.

Contact Resistance: $\leq 10m\Omega$ /Contact

Dielectric voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C

Material

Insulator:High Temperature Thermoplastic, UL94V-0

Terminal:Copper Alloy

ORDER INFORMATION

5 M S 1 S 1 9 N - 1 X X X X B T U - 0482 - 0 1

1:Single Row




No. of contacts
per row(01~40)

S0:Selective
☆Remark
Finger:Gold plated
Sleeve:Tin plated

B:Black Insulator

©T:Tube, W/O Cap

RoHS

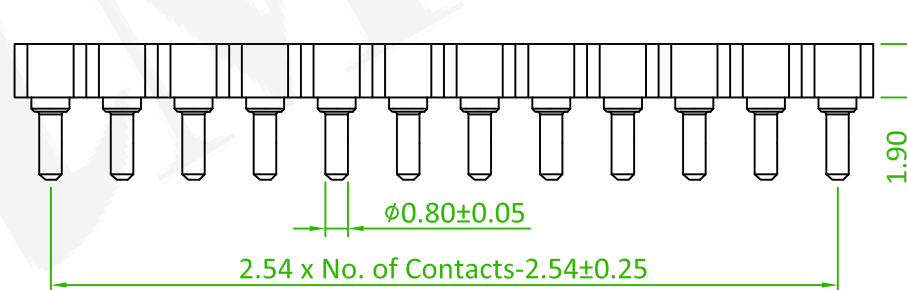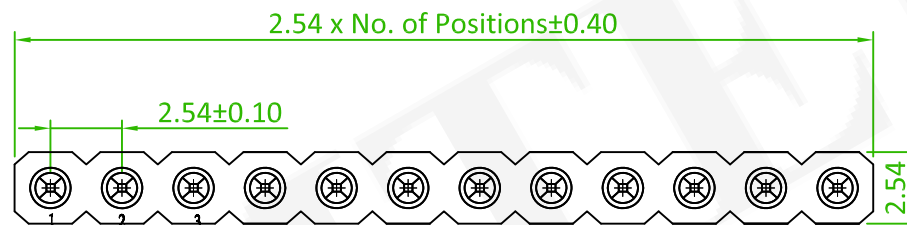

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Old Part No.:MS1S19-1XX-482-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN SOCKET STRIP TYPE 2.54mm			頁數 Page	1/1
	品號 PART NO.	5MS1S19N-1XXXXBTU-0482-01			繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/09/16
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/16
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION