

SPECIFICATIONS

Current Rating: 3 AMP

Insulation Resistance: $\geq 1000M\Omega$ at $V=100V$.

Contact Resistance: $\leq 10m\Omega$ /Contact

Dielectric Voltage: 1000V AC for one minute

Operation Temperature: $-40^{\circ}C$ to $+105^{\circ}C$

MATERIAL




Insulator: Hi-Temp. Thermoplastic, UL94V-0

Contact Pin: Copper Alloy

ORDER INFORMATION

5 M S 1 S 3 0 N - 1 X X X X B B U - 0740 - 0 1

1:Single Row	No. of Contacts per Row(01~40)	S0:Selective ☆Remark Finger:Gold plated Sleeve:Tin plated	B:Black	B:Bag	RoHS
--------------	--------------------------------	--	---------	-------	------

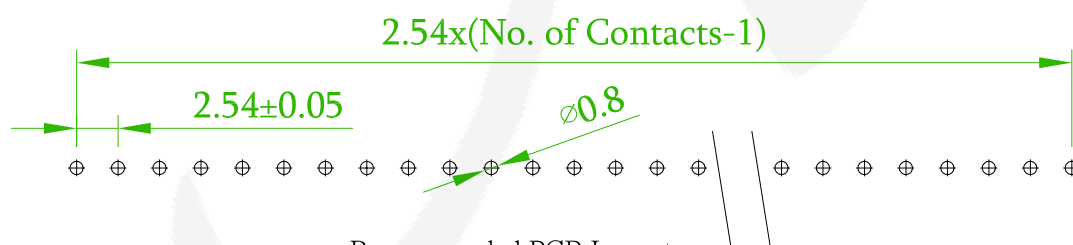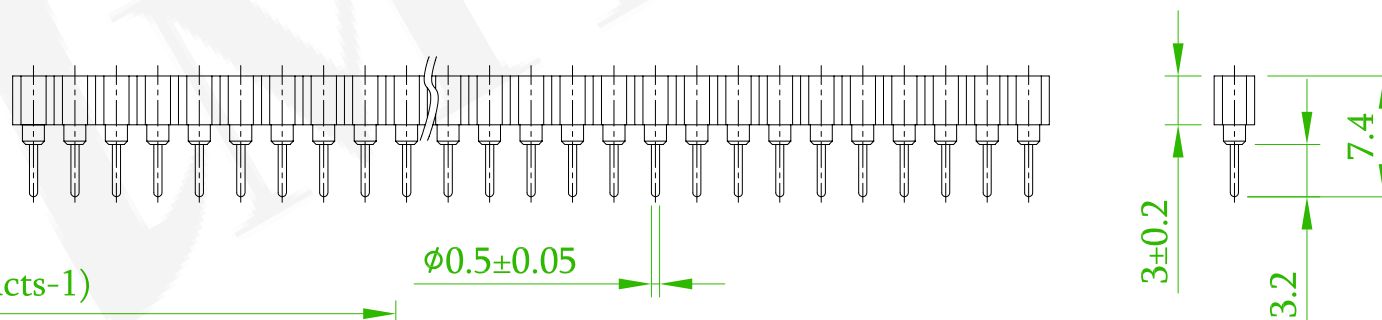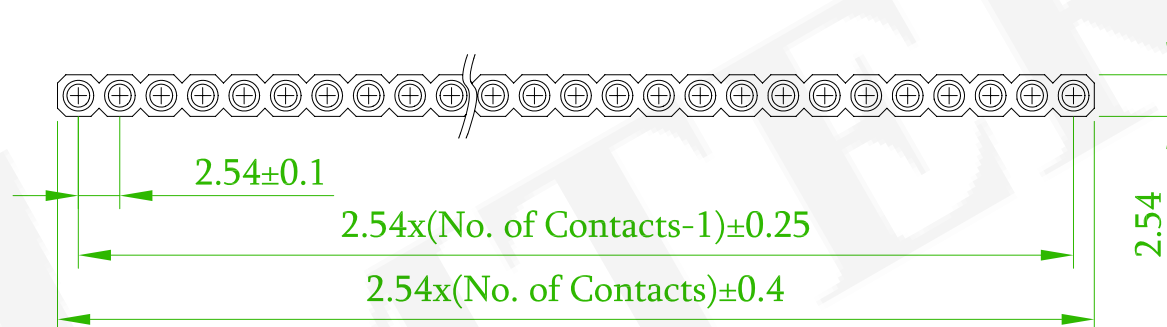

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

Old Part No.:MS1S-1XX-U

REV.	ECN/ECR NO.:170517, revise the package: T: Tube W/O Cap -> B: Bag.	Gary	2017/05/09
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm MACHINE PIN SOCKET S/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5MS1S30N-1XXXXBBU-0740-01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.	GN032-GA397				核對 CHECKED	John 2015/09/16
	客戶品號 CUSTOMER P/N					承認 APPROVED	John 2015/09/16
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15				單位 UNIT	mm
						THIRD ANGLE PROJECTION	