

ORDER INFORMATION

SPECIFICATION

Current Rating: 3 AMP

Insulation Resistance: $\geq 1000M\Omega$ at 100VAC

Contact Resistance: $\leq 10m\Omega$ / contact

Dielectric Voltage: 1000V AC for one minute






Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: PPS, UL94V-0

Contact Pin: Copper Alloy

5 M S 1 S 3 0 N - 1 X X X X B X $\triangle_C$ U - 0540 - 0 1

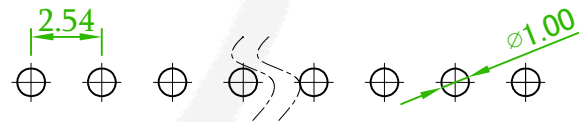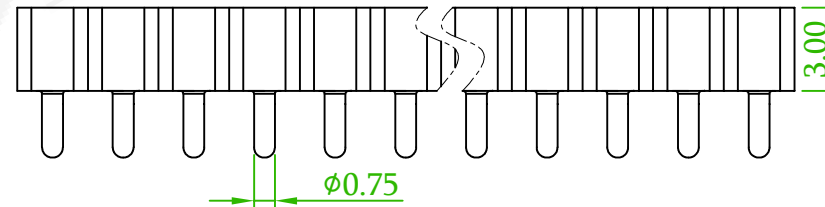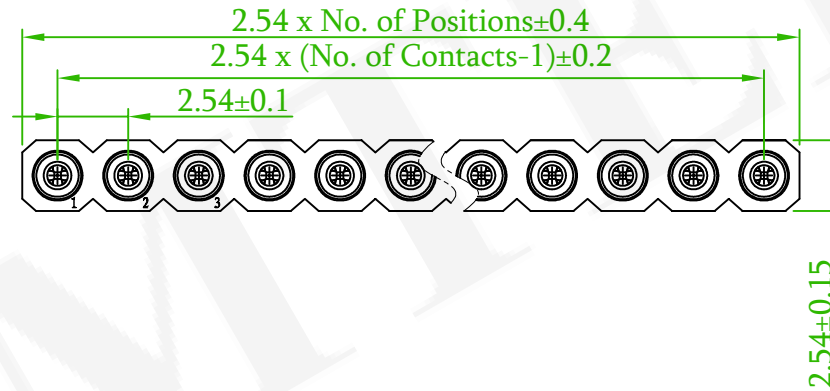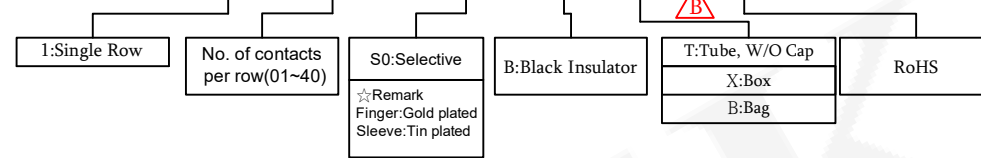

Recommended P.C.B Layout
TOLERANCE ± 0.1

Old Part No.:MS1S30-1XX-540-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN SOCKET STRIP TYPE 2.54mm				頁數 Page	1/1
	品號 PART NO.	5MS1S30N-1XXXXBXU-0540-01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.	GN003-GA550	版本 REV.	C	核對 CHECKED	John 2015/09/16	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/16	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	.X $^{\circ} \pm 3$	單位 UNIT	mm	THIRD ANGLE PROJECTION	

$\triangle_C$ x1	Add the package: B:Bag	David	2020/04/16
$\triangle_B$ x1	ECN NO. : 170819. Add the package: X:Box.	Gary	2017/10/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE