

SPECIFICATIONS

Current Rating: 3 AMP

Contact Resistance: 10mΩ Max.

Dielectric Voltage: 1000V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL


Insulator: PPS+30%G.F. , UL94V-0

Contact Pin: Brass



ORDER INFORMATION

5 M S 1 S 3 0 N - 2 X X X X B X U - 0540 - 0 1

2: Dual Row	No. of Contacts per Row(02-50)	S0: Selective Au SB: 10u" SF: 15u" SD: 30u" T0: Tin Plated	B: Black	T: Tube W/O Cap X: Box	RoHS
-------------	-----------------------------------	--	----------	---------------------------	------

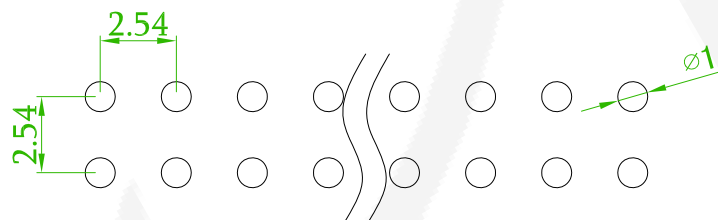

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

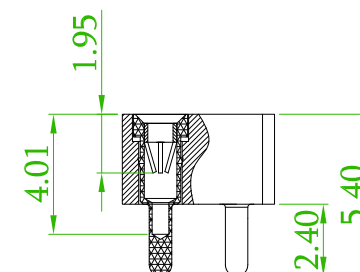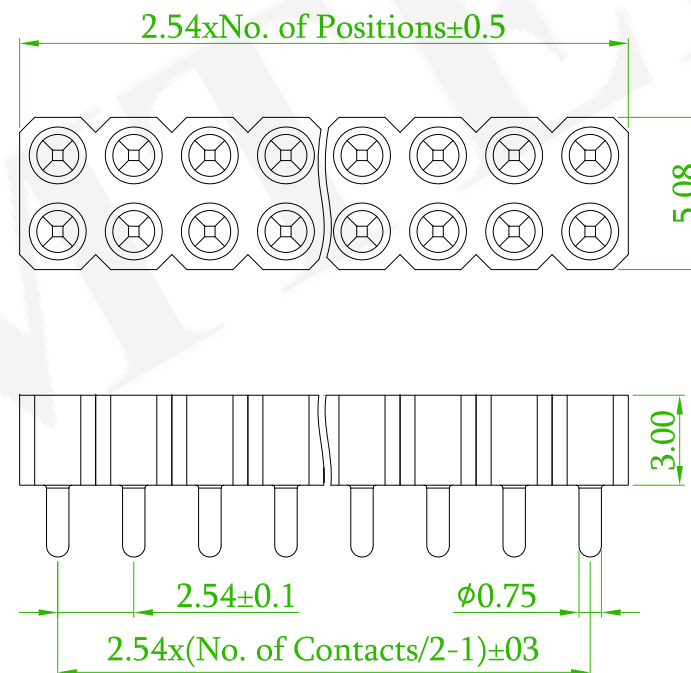

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN SOCKET 2.54mm				頁數 Page	1/1
	品號 PART NO.	5MS1S30N-2XXXXBXU-0540-01				繪圖 DRAWN	Gary 2017/10/19
	圖號 DRAWING NO.	GN003-GA690				核對 CHECKED	Jason 2017/10/19
	客戶品號 CUSTOMER P/N					承認 APPROVED	Jason 2017/10/19
	公差 TOLERANCE	±0.25				單位 UNIT	mm
		版本 REV.	A	比例 SCALE	None	THIRD ANGLE PROJECTION	