

SPECIFICATIONS





Current Rating:3 AMP
Insulation Resistance:≥1000MΩ at V=100V.
Contact Resistance:≤10mΩ/Contact
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:High Temperature Thermoplastic, UL94V-0
Terminal:Copper Alloy

ORDER INFORMATION

5MS1S42N-1XXXXBXU-0740-01

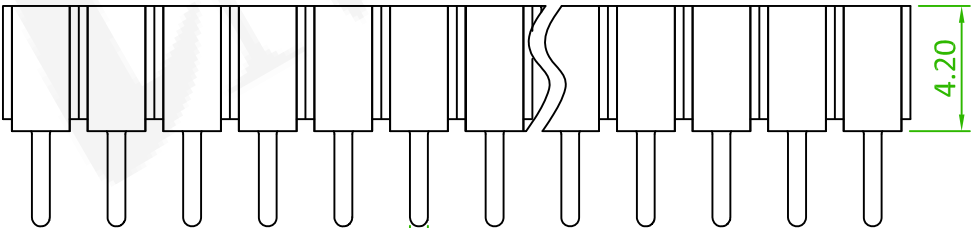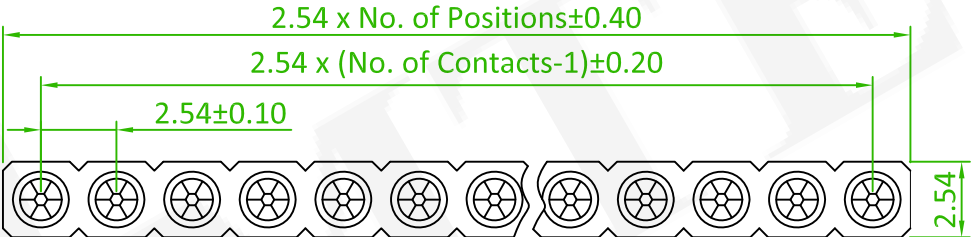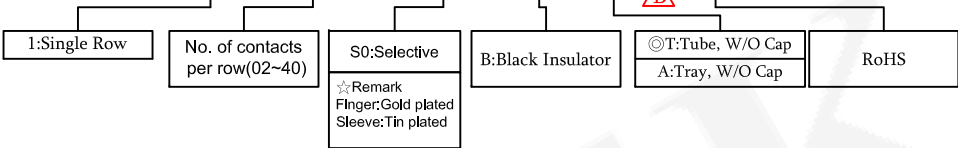

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Old Part No.:MS1S42-1XX-U

△	Add the Package Option: A:Tray, W/O Cap	B	2017/03/21 Roy
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MACHINE PIN SOCKET STRIP TYPE 2.54mm				頁數 Page	1/1
品號 PART NO.	5MS1S42N-1XXXXBXU-0740-01				繪圖 DRAWN	Jeff 2015/09/16
圖號 DRAWING NO.	GN003-RL590				版本 REV.	B
客戶品號 CUSTOMER P/N					核對 CHECKED	John 2015/09/16
公差 TOLERANCE	.X ±0.30 .XX ±0.25	.X°±3	單位 UNIT	mm	承認 APPROVED	John 2015/09/16
					THIRD ANGLE PROJECTION	