

Specifications


Current Rate:3 AMP
Insulation Resistance:≥1000MΩ at V=100V.
Contact Resistance:≤10mΩ/Contact
Dielectric voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material



Insulator:High Temperature Thermoplastic, UL94V-0
Terminal:Copper Alloy

ORDER INFORMATION



5MS2M28N-2XXS0BXU-0000-01

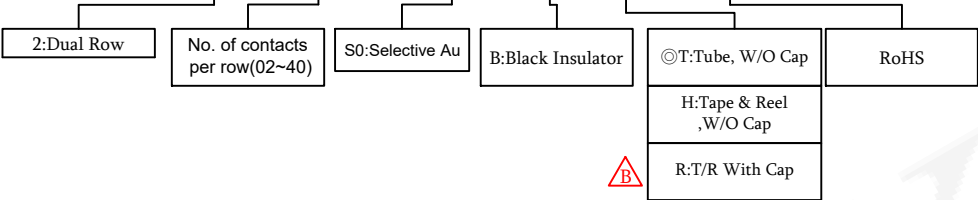

AMTEK 耀德
2022.03.15
Released DCC

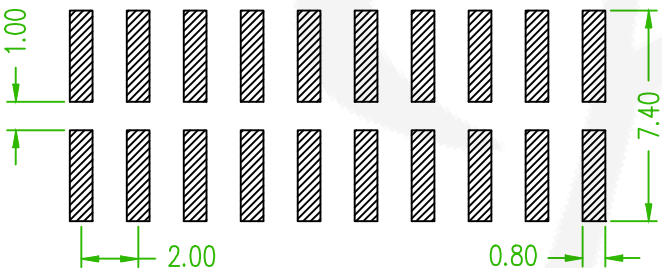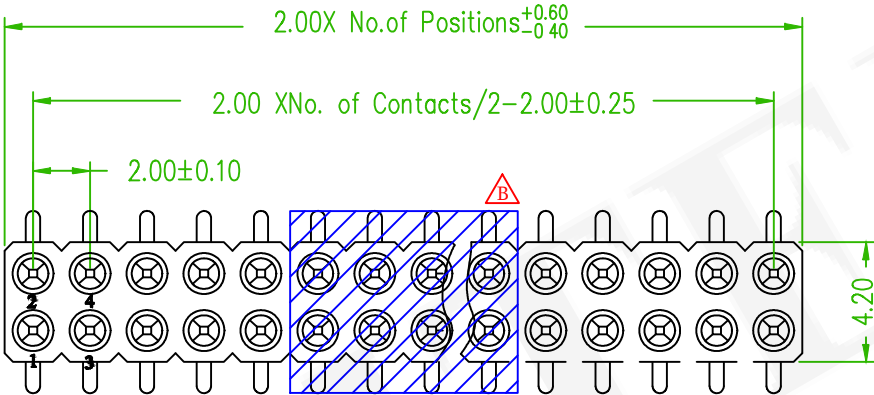

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

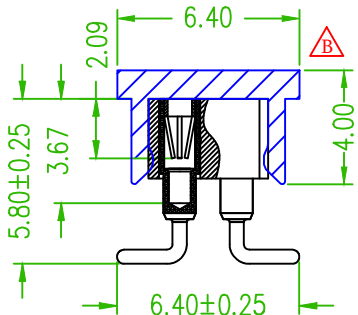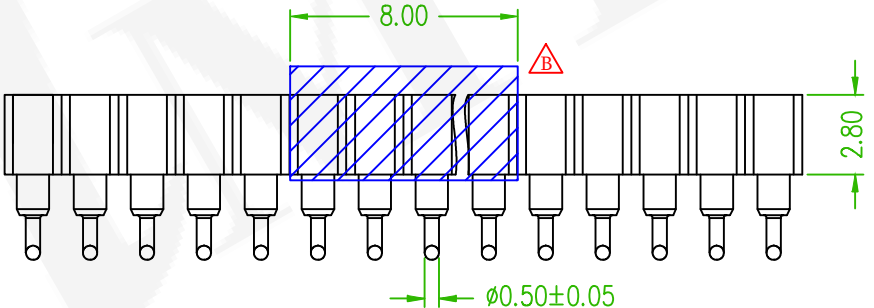

Old Part No.:MS2M-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Bx4	Add the T/R+Cap Options	Alice	2022/03/15

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MACHINE PIN SOCKET SMT TYPE 2.0mm				頁數 Page	1/1
品號 PART NO.	5MS2M28N-2XXS0BXU-0000-01				繪圖 DRAWN	Jeff 2015/09/16
圖號 DRAWING NO.	GN003-DV792	版本 REV.	B	核對 CHECKED	John 2015/09/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/16	
公差 TOLERANCE	.X ±0.30 .XX ±0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	