

SPECIFICATIONS

Current Rating: 3 AMP
Insulation Resistance: ≥1000MΩ at V=100V.
Contact Resistance: ≤10mΩ/Contact
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0
Contact Pin: Copper Alloy


ORDER INFORMATION

5 M S 2 S 2 8 N - 2 X X S 0 B X U - 0740 - 0 1

2: Dual Row	No. of Contacts per Row(01~40)	S0: Selective ☆Remark Finger: Gold plated Sleeve: Tin plated	B: Black Insulator	T: Tube B: Bag	RoHS
-------------	--------------------------------	---	--------------------	-------------------	------



AMTEK 耀德
2018.08.21
Released DCC

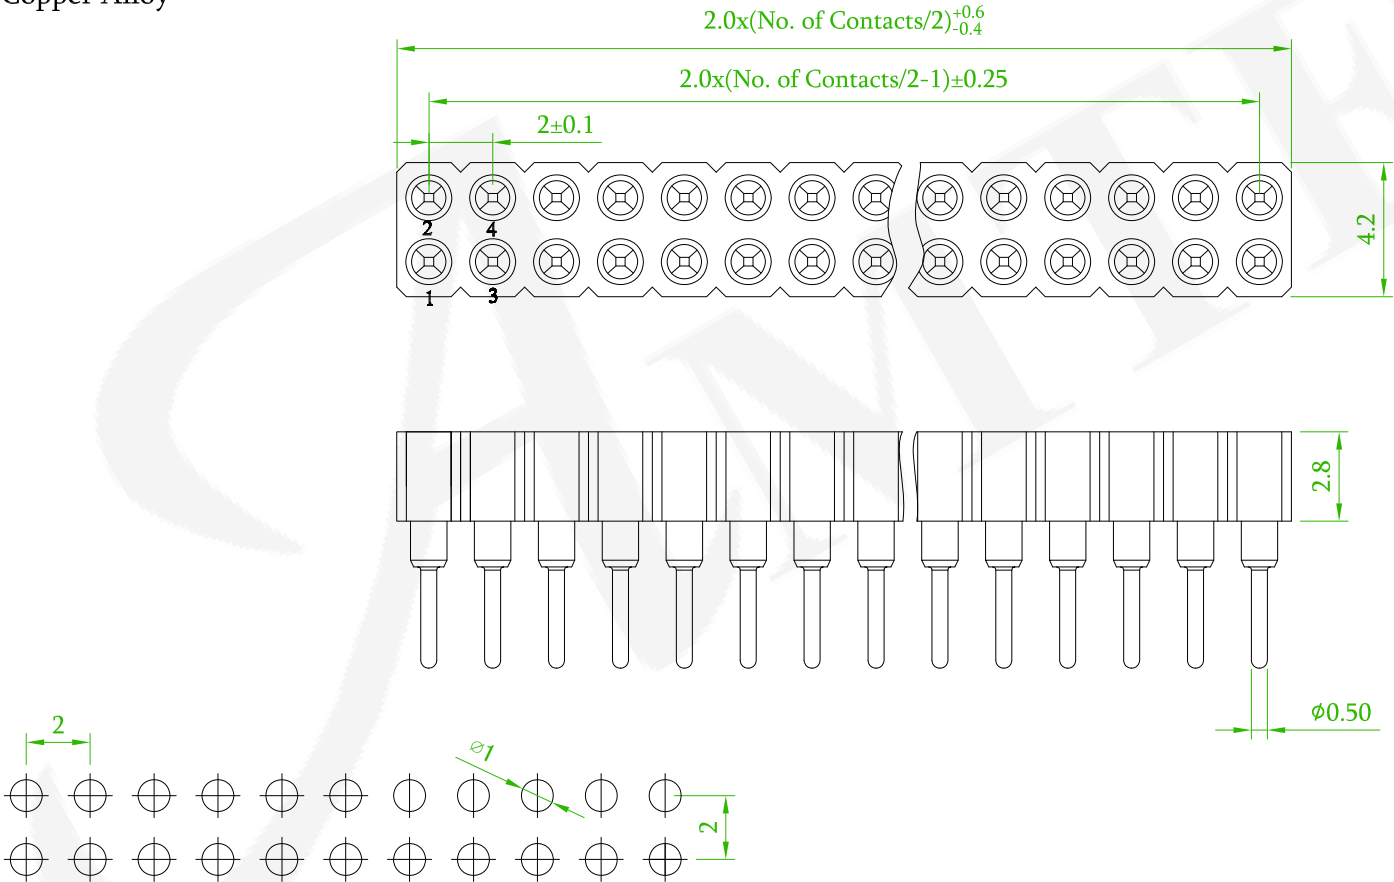

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:MS2S-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
1	Add a package: B: Bag.	Gary	2018/08/21

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm MACHINE PIN SOCKET D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5MS2S28N-2XXS0BXU-0740-01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.	GN003-GB354		版本 REV.	B	核對 CHECKED	Josh 2018/08/21
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/08/21
	公差 TOLERANCE	.X ±0.30 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		