

Specifications






Current Rate:3 A
 Voltage Rate:100 Vrms/150 VDC
 Insulation Resistance:1000 MΩ min
 Contact Resistance:10mΩ max
 Capacitance: 1pF max
 Dielectric strength: 5000VRMS/minute min
 Sleeve retention force: 1 Kg/contact min
 Operation Temperature:-55°C to +105°C

Material

Insulator Material:High Temperature Thermoplastic,UL 94V-0
 Terminal: Brass

ORDER INFORMATION

5 M S 2 S 2 8 N - 2 X X X X B T U - 0650 - 0 1

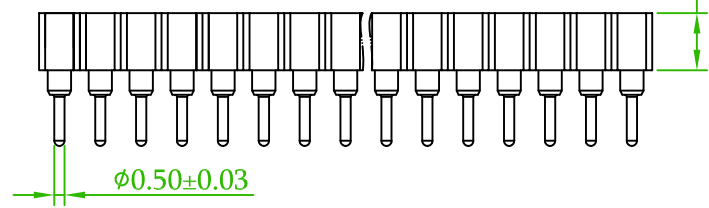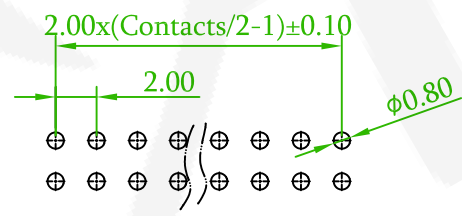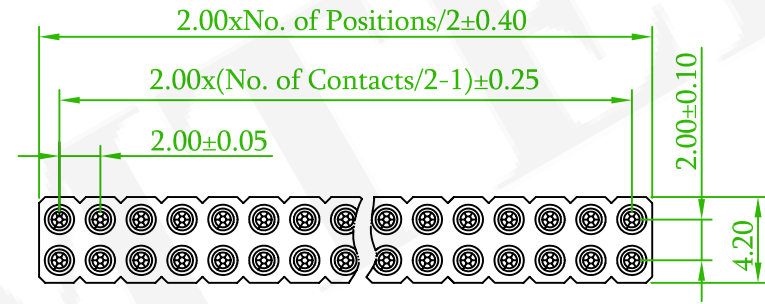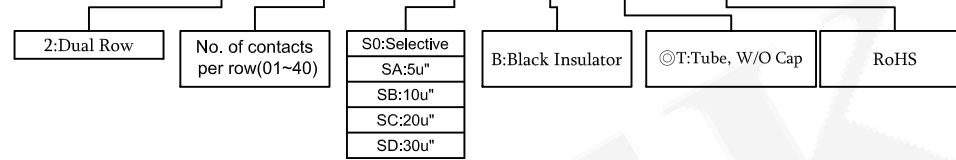

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Old Part No.:MS2S-2XX-650-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	MACHINE PIN SOCKET STRIP TYPE 2.00mm			頁數 Page	1/1
品號 PART NO.	5MS2S28N-2XXXXBTU-0650-01			繪圖 DRAWN	David 2019/03/29
圖號 DRAWING NO.	GN005-DV027	版本 REV.	A	核對 CHECKED	Josh 2019/03/29
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/03/29
公差 TOLERANCE	.X ±0.30 .XX ±0.25	.X°±2	單位 UNIT	mm	THIRD ANGLE PROJECTION