

SPECIFICATIONS

Current Rating: 3 AMP
Insulation Resistance: ≥1000MΩ at V=100V.
Contact Resistance: ≤10mΩ/Contact
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C




MATERIAL

Insulator: PPS+30%G.F., UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

5 M S 3 M 3 8 N - 2 X X X X B X U - 0000 - 0 1

2: Dual Rows	No. of contacts per row (02-50)	G0: Gold Flash S0: Selective Au	B: Black	T: Tube A: Tray H: Tape & Reel	RoHS
--------------	---------------------------------	------------------------------------	----------	--------------------------------------	------

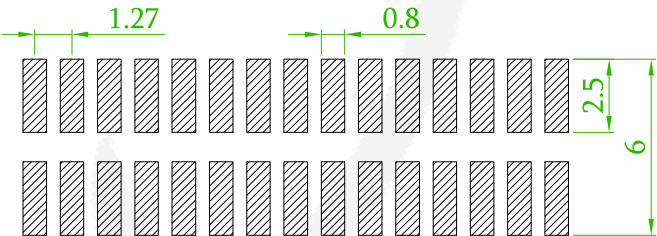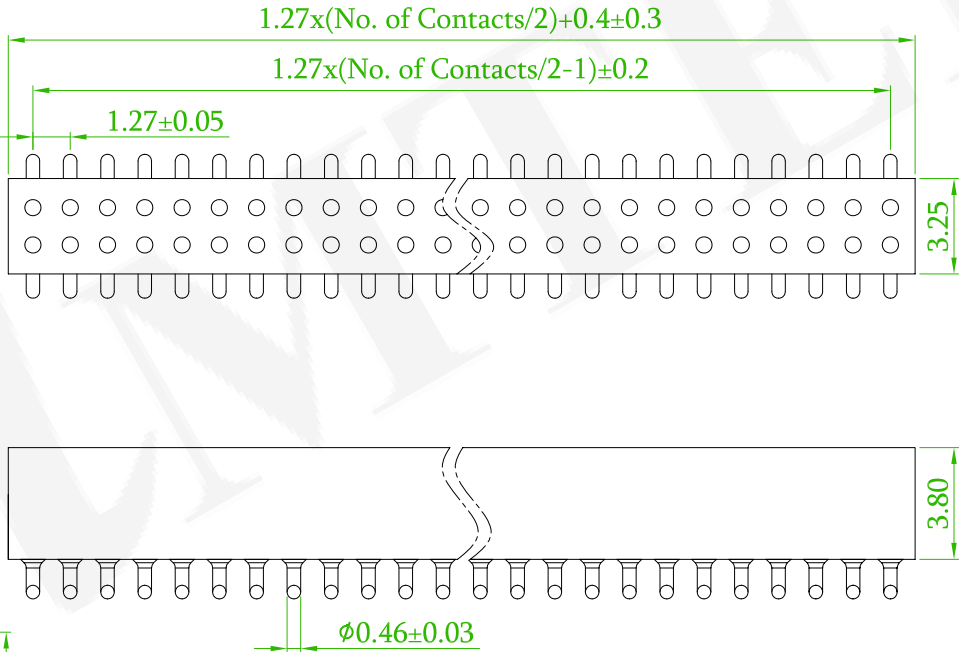

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:MS3M-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x2	Add the plated: G0, packages: A, H.	Gary	2018/10/01

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.27mm MACHINE PIN SOCKET D/R V/T SMT TYPE				頁數 Page	1/1
	品號 PART NO.	5MS3M38N-2XXXXBXU-0000-01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.	GN003-GB434		版本 REV.	B	核對 CHECKED	Josh 2018/10/01
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/10/01
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	