

Specifications





Current Rate:1.0 AMP
Insulation Resistance:≥1000MΩ at V=100V.
Contact Resistance:≤10mΩ/Contact
Dielectric voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:PPS+30% G.F, UL94V-0
Terminal:Copper Alloy

ORDER INFORMATION

5MS3R38N-2XXS0BTU-0000-01

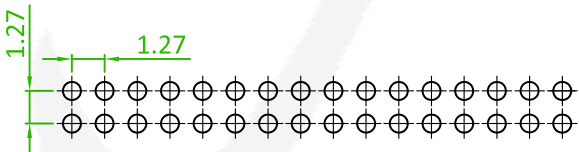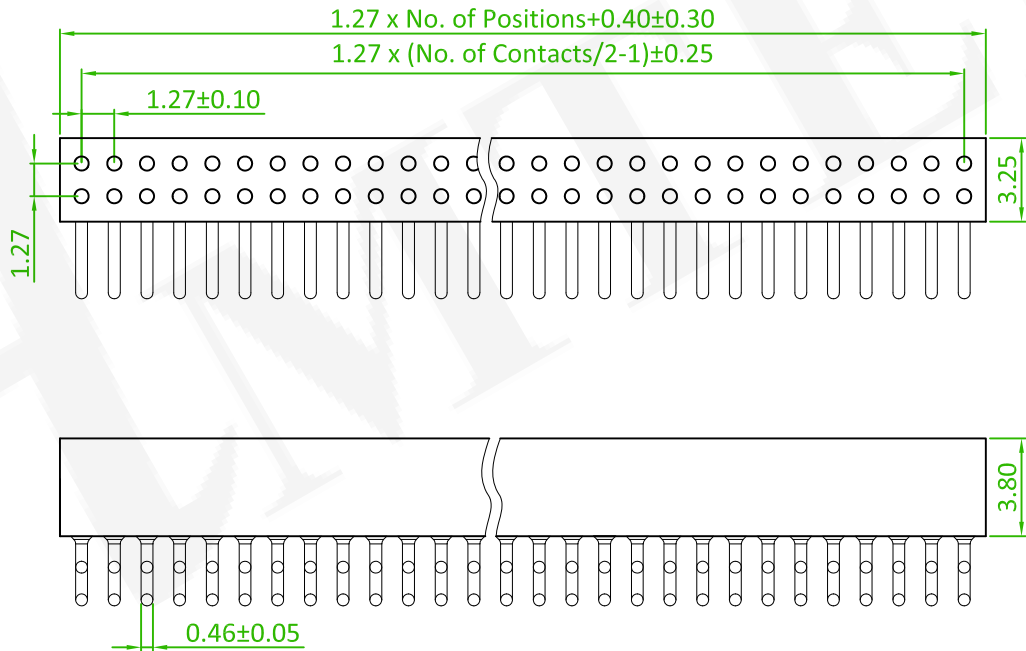

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Old Part No.:MS3R-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN SOCKET SMT TYPE 1.27mm				頁數 Page	1/1
	品號 PART NO.	5MS3R38N-2XXS0BTU-0000-01				繪圖 DRAWN	Nick 2019/11/18
	圖號 DRAWING NO.	GN003-NI520		版本 REV.	A	核對 CHECKED	Josh 2019/11/18
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2019/11/18
	公差 TOLERANCE	.X ±0.40 .XX ±0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	
		.X° ±3					