

Specifications




Current Rate:3 AMP
Insulation Resistance: $\geq 1000M\Omega$ at V=100V.
Contact Resistance: $\leq 10m\Omega$ /Contact
Dielectric voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:High Temperature Thermoplastic, UL94V-0
Terminal:Copper Alloy

ORDER INFORMATION

5 M S 3 R 3 8 N - 3 X X X X B T U - 0000 - 0 1

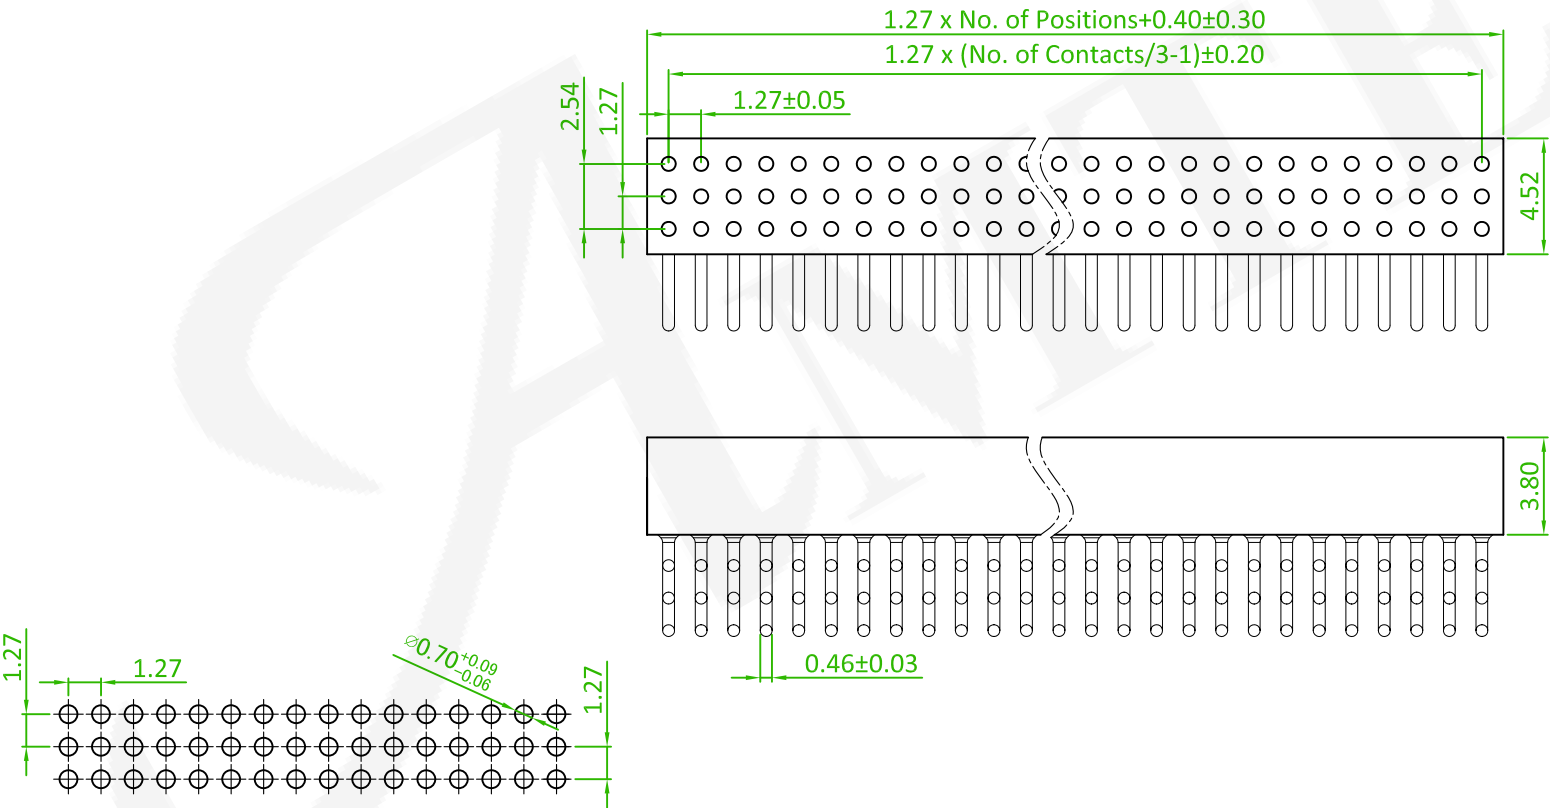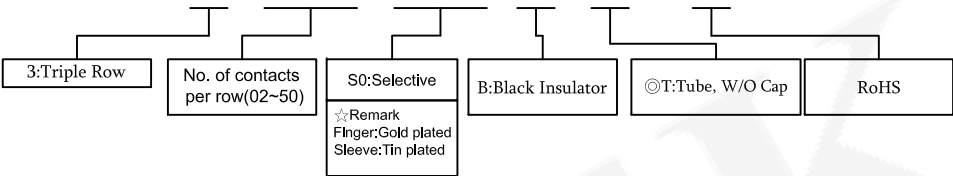

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Old Part No.:MS3R-3XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN SOCKET SMT TYPE 1.27mm			頁數 Page	1/1
	品號 PART NO.	5MS3R38N-3XXXXBTU-0000-01			繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/09/16
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/16
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION 