

SPECIFICATIONS

Current Rating:1 AMP
Contact Resistance:10mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:High Temperature Thermoplastic, UL94V-0
Terminal:Copper Alloy

ORDER INFORMATION

5 M S 3 S 3 8 N - 2 X X X X B X U - 0640 - 0 1

2: Dual Row

No. of contacts per row(02~50)

S0: Selective
SB: 10u"
SF: 15u"
SD: 30u"
T0: Tin Plated





B: Black Insulator

T: Tube, W/O Cap
A: Tray, W/O Cap

RoHS



AMTEK 糧德
2019.12.27
Released DCC

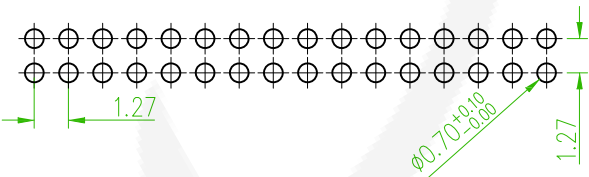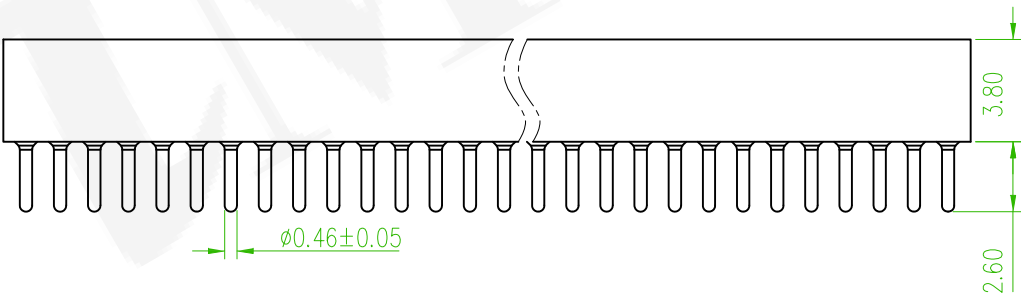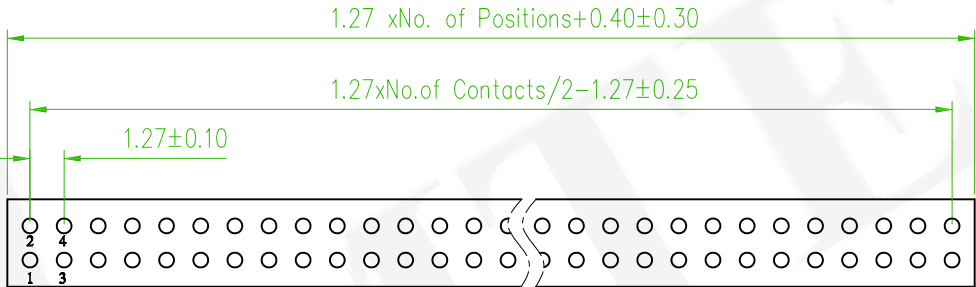

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Old Part No.:MS3S-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN SOCKET SMT TYPE 1.27mm				頁數 Page	1/1
	品號 PART NO.	5MS3S38N-2XXXXBXU-0640-01				繪圖 DRAWN	Roy 2016/09/29
	圖號 DRAWING NO.	GN003-NI664				核對 CHECKED	Jonny 2016/09/29
	客戶品號 CUSTOMER P/N					承認 APPROVED	Aaron 2016/09/29
	公差 TOLERANCE	.X ±0.40 .XX ±0.25 .X°±3				單位 mm	THIRD ANGLE PROJECTION