

SPECIFICATIONS

Current Rating: 1 AMP

Contact Resistance: 10mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operating Temperature: -40°C ~ +105°C

MATERIAL



Insulator: PPS+30%G.F., UL94V-0

Contact Pin: Copper Alloy



ORDER INFORMATION

5 M S 3 S 3 8 N - 3 X X X X B X U - 0 6 4 0 - 0 1

3: Triple Row	No. of Contacts (02-50)	S0: Selective SB: 10u" SF: 15u" SD: 30u" T0: Tin Plated	B: Black	T: Tube A: Tray	RoHS
---------------	----------------------------	---	----------	--------------------	------

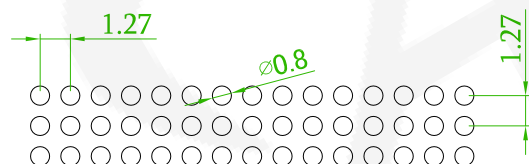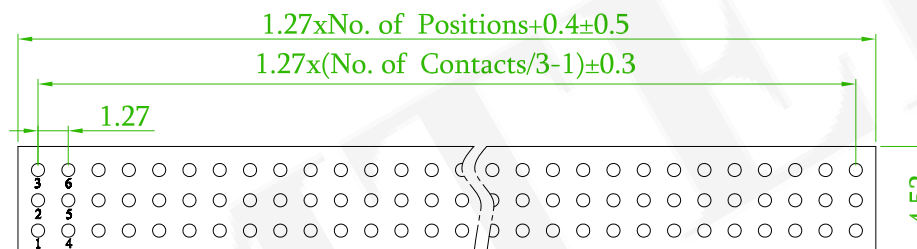

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

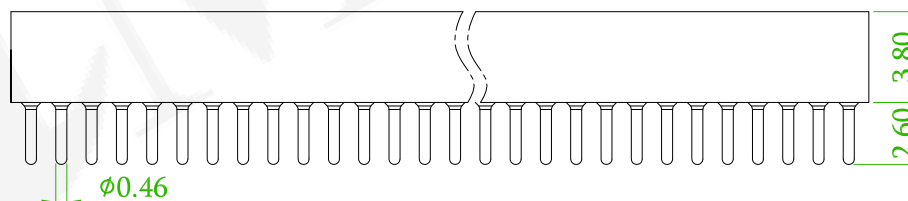

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN SOCKET 1.27mm				頁數 Page	1/1
	品號 PART NO.	5MS3S38N-3XXXXBXU-0640-01				繪圖 DRAWN	Gary 2017/11/16
	圖號 DRAWING NO.	GN003-GA777	版本 REV.	A	核對 CHECKED	Jason 2017/11/16	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/11/16	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		