SPECIFICATIONS

Current Rating: 1 AMP AC/DC
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operaing voltage:60V AC/DC
Operation Temperature: -40°C to +105°C
Soldering temperature: +255°C
Mechanical Life cycle : 500 Min

MATERIAL

Insulator: PPS, UL94V-0
Contact Pin:Brass
Cllp(Contact 6 Flnger):Beryllium copper,heat teated

ORDER INFORMATION

5 M S 3 S 4 1 N - 1 X X X X B T U - 0640 - 0 2

1:Single Row	No. of contacts per row(01~50)	G0:Gold Flash	S0:Selective	B:Black Insulator	T:Tube W/O Cap	RoHS
		GA:5u"	SA:5u"			
		GB:10u"	SB:10u"			
		GC:20u"	SC:20u"			
		GD:30u"	SD:30u"			

certified Pb RoHS Compliant

AMTEK糧德
2020.11.20
Released DCC

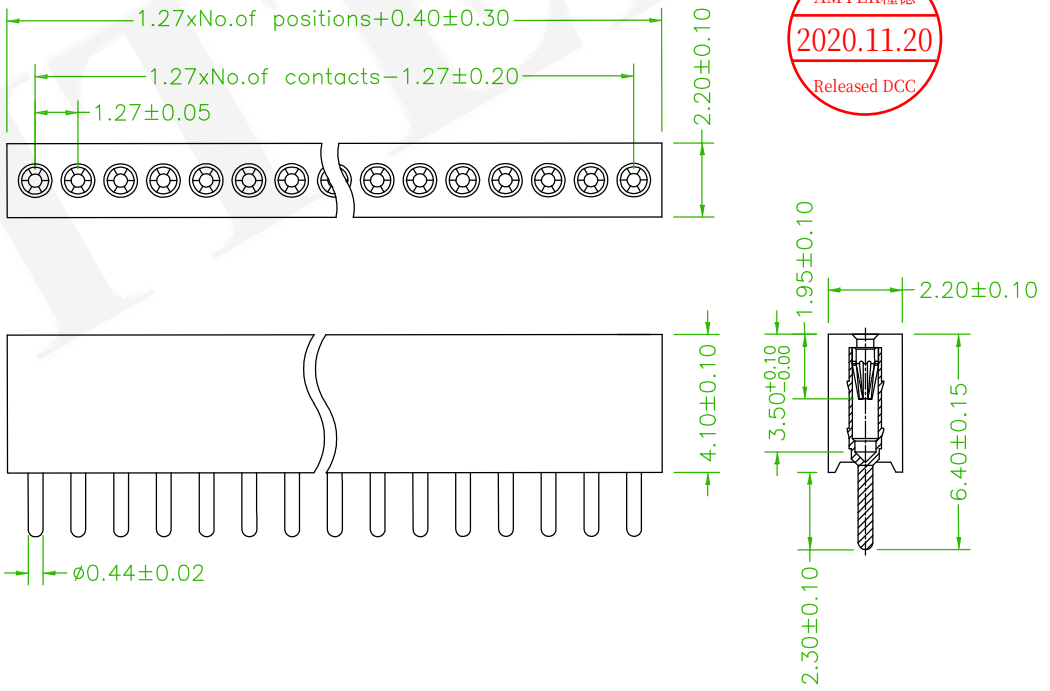

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MACHINE PIN SOCKET DIP TYPE 1.27mm			頁數 Page	1/1
品號 PART NO.	5MS3S41N-1XXXXBXU-0640-02			繪圖 DRAWN	Benson 2020/11/19
圖號 DRAWING NO.	GN202-BN366	版本 REV.	A	核對 CHECKED	Josh 2020/11/19
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/11/19
公差 TOLERANCE	.X ±0.20 .XX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	