

SPECIFICATIONS

Current Rating: 3 AMP
Insulation Resistance :≥1000MΩ at V=100V.
Contact Resistance: ≤10mΩ/Contact
Dielectric Voltage 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

5 M S 7 S 3 0 N - 1 X X X X B X U - 0740 - 0 1

1:Single Row


No. of Contacts
per Row(02~38)

S0:Selective
☆Remark
Finger:Gold plated
Sleeve:Tin plated

B:Black

T:Tube
B:Bag

RoHS

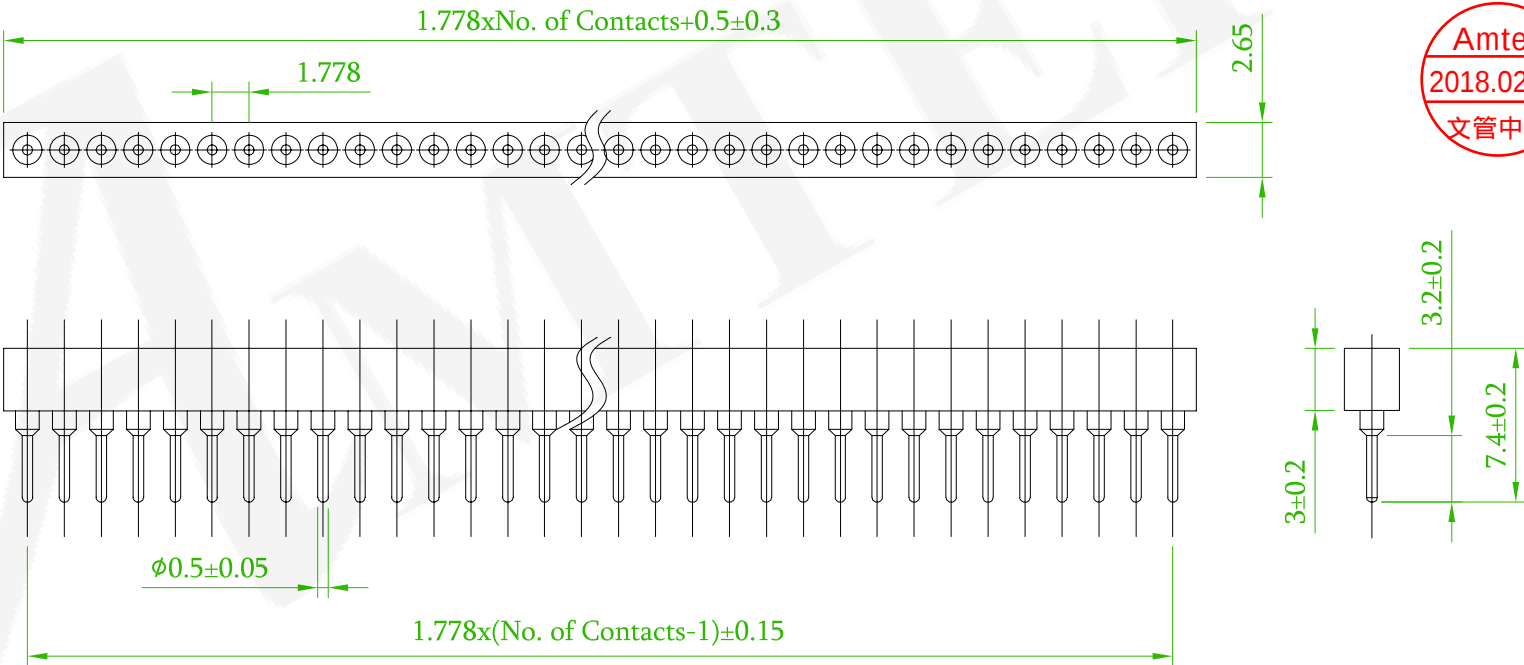

Old Part No.:MS7S-1XX-U

	Add an option of package: B: Bag.	Gary	2018/02/27
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.778mm MACHINE PIN SOCKET S/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5MS7S30N-1XXXXBXU-0740-01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.	GN032-GB006		版本 REV.	B	核對 CHECKED	Josh 2018/02/27
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/02/27
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	
		.X° ± 3					