

MATERIAL

Insulator: Nylon 9T,UL94V-0,Black

Contact Pin: Brass

ORDER INFORMATION

5 P H 1 C D A 2 5 - 1 X X X X N N X U - A B C - 0 0

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash
GA:Au 5u"

GB:Au 10u"

GC:Au 20u"

GD:Au 30u"

T0:Tin Plated

S0:Selective Au
SA:Selective Au 5u"

SB:Selective Au 10u"

SC:Selective Au 20u"

SD:Selective Au 30u"

TE:Tin 200u"

N:Non Type

N:W/O Peg

X:Box
B:Bag

U:RoHS+Hi-Temp.

EX:035076025





A:3.50

B:7.62

C:2.54




AMTEK 耀德
2022.01.05
Released DCC

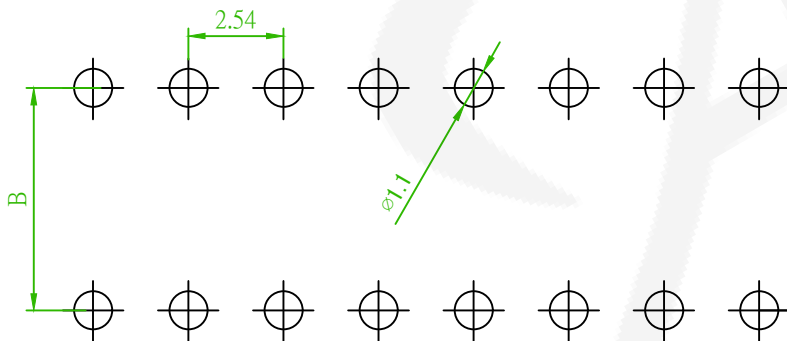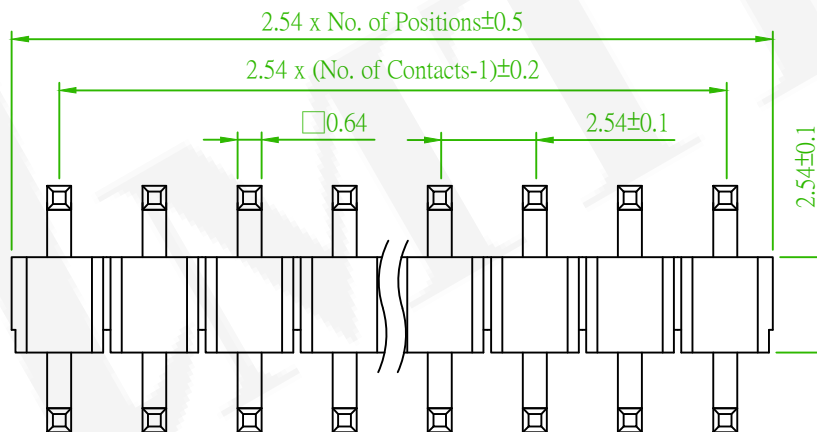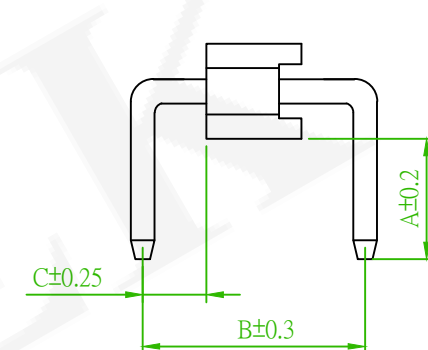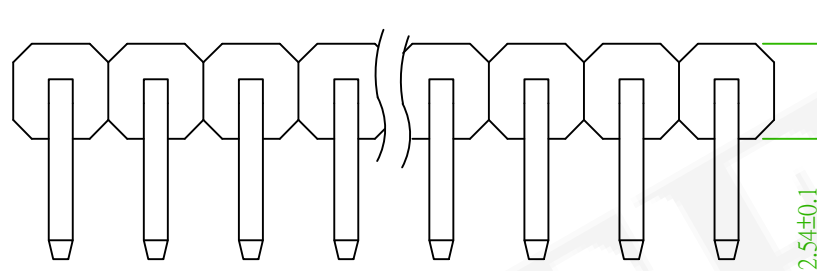

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PH1C25-1XX-U



品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1CDA25-1XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2015/08/14
圖號 DRAWING NO.	GN016-GA096	版本 REV.	C	核對 CHECKED	John 2015/08/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/14	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
	Modify order information	B	2017/01/20 Gary