





MATERIAL

Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass

ORDER INFORMATION


5 P H 1 C D A 2 5 - 2 X X X X N N X U - A B C - 0 0

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS+Hi-Temp.	X: Box B: Bag T: Tube	EX: 035055025 A: 3.5 B: 5.54 C: 2.5
-------------	-----------------------------------	---	--	---------------------------	------------------	-----------------------------	--

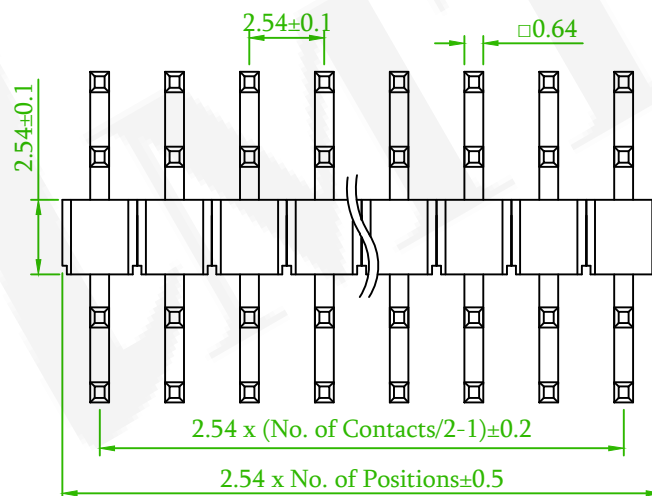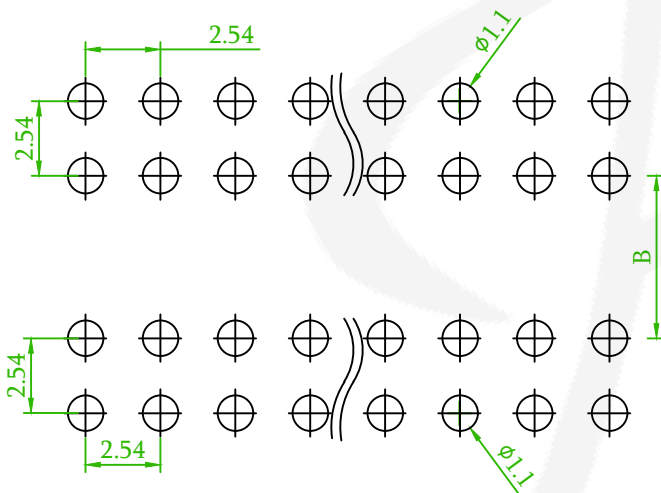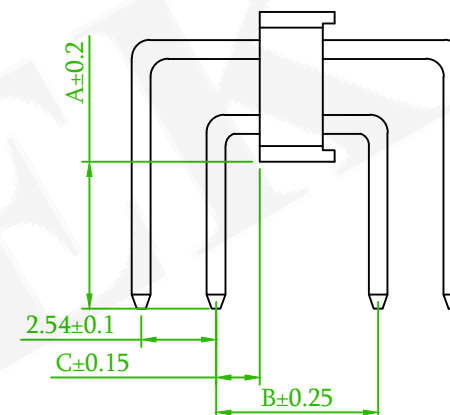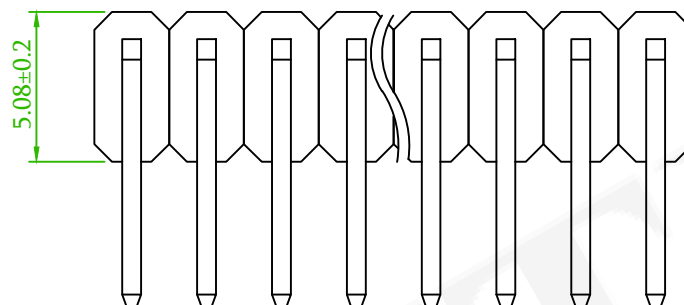

Old Part No. : PH1C25-2XX-U

Recommended PCB Layout
(PCB TOLERANCE ±0.1)



品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1CDA25-2XXXXNNU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN016-GA098	版本 REV.	D	核對 CHECKED	Johnny 2016/09/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

 A1	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
	Revise the drawing	C	2020/08/27
	Modify order information	B	2017/01/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE