

MATERIAL

Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 1 D D A 1 5 - 1 X X X X N N X U - A  L 1 B - 0 0

1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS+Hi-Temp. X: Box B: Bag	EX:060XXX030 A:6.0 L1:As Required B:3.0
--------------	-----------------------------------	--	--	---------------------------	--------------------------------------	--



Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

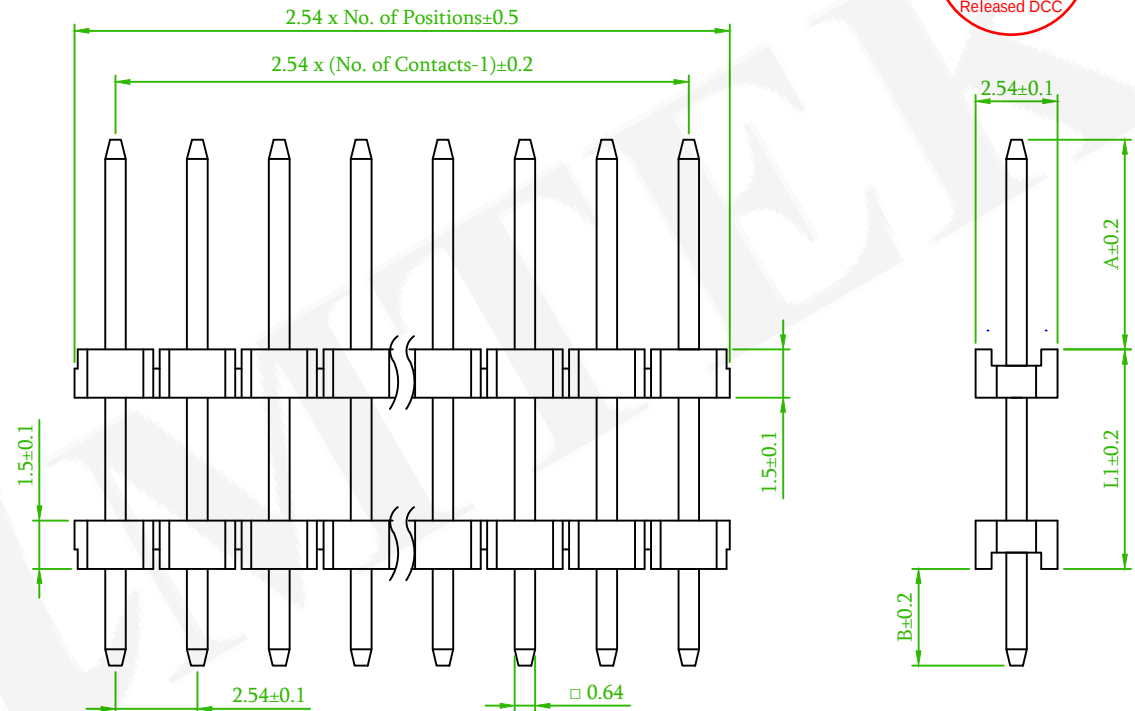

Old Part No. : PH1D15-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm S/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PH1DDA15-1XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Joey 2016/09/07
	圖號 DRAWING NO.	GN016-GA100	版本 REV.	F	核對 CHECKED	Josh 2018/03/22	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

 x1	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
 x1	ECN No.:210619 Cancel the top view	Alice	2021/09/14
	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE