

MATERIAL ⚠

Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5PH1DDA15-2XX-XX


2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash	S0: Selective Au
		GA: Au 5u"	SA: Selective Au 5u"
		GB: Au 10u"	SB: Selective Au 10u"
		GC: Au 20u"	SC: Selective Au 20u"
		GD: Au 30u"	SD: Selective Au 30u"
		T0: Tin Plated	TE: Tin 200u"

NNXU-ALB-00



N: Non Type	U: RoHS+Hi-Temp.	EX: 060XXX030 A: 6.0 L1: As Required B: 3.0
N: W/O Peg	X: Box B: Bag	



AMTEK 耀德
2022.01.05
Released DCC

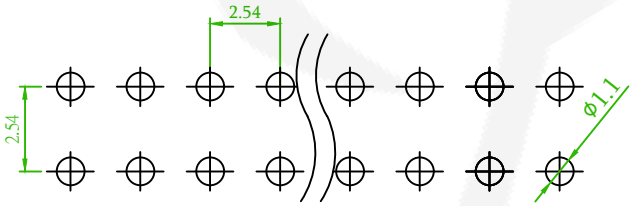

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

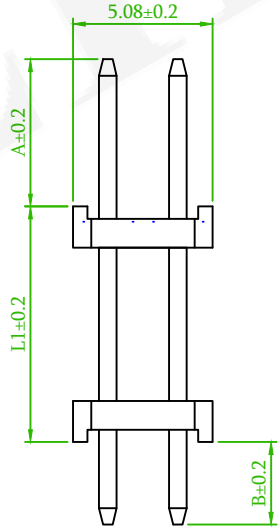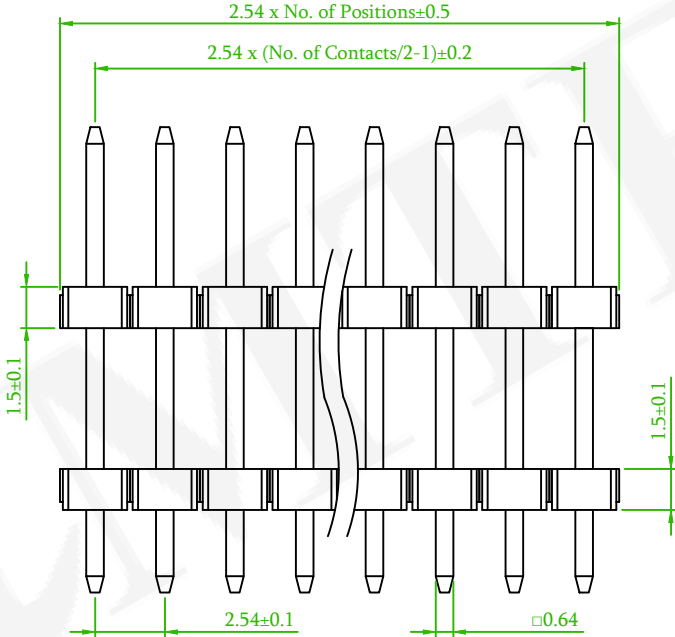

Old Part No. : PH1D15-2XX-U

⚠	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
⚠	ECN No.:210619 Cancel the top view	Alice	2021/09/14
⚠	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH1DDA15-2XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN016-GA102	版本 REV.	F	核對 CHECKED	Josh 2018/03/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		