

MATERIAL △F

Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5PH1DDA17-1XXXXNNU-ALB-00

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

S0:Selective Au

SA:Selective Au 5u"

SB:Selective Au 10u"

SC:Selective Au 20u"

SD:Selective Au 30u"

TE:Tin 200u"

N:Non Type

N:W/O Peg

U:RoHS+Hi-Temp.

X:Box

B:Bag

EX:060XXX030

A:6.0

L1:As Required

B:3.0

AMTEK 耀德


2022.01.05

Released DCC

Certified

Pb

RoHS Compliant

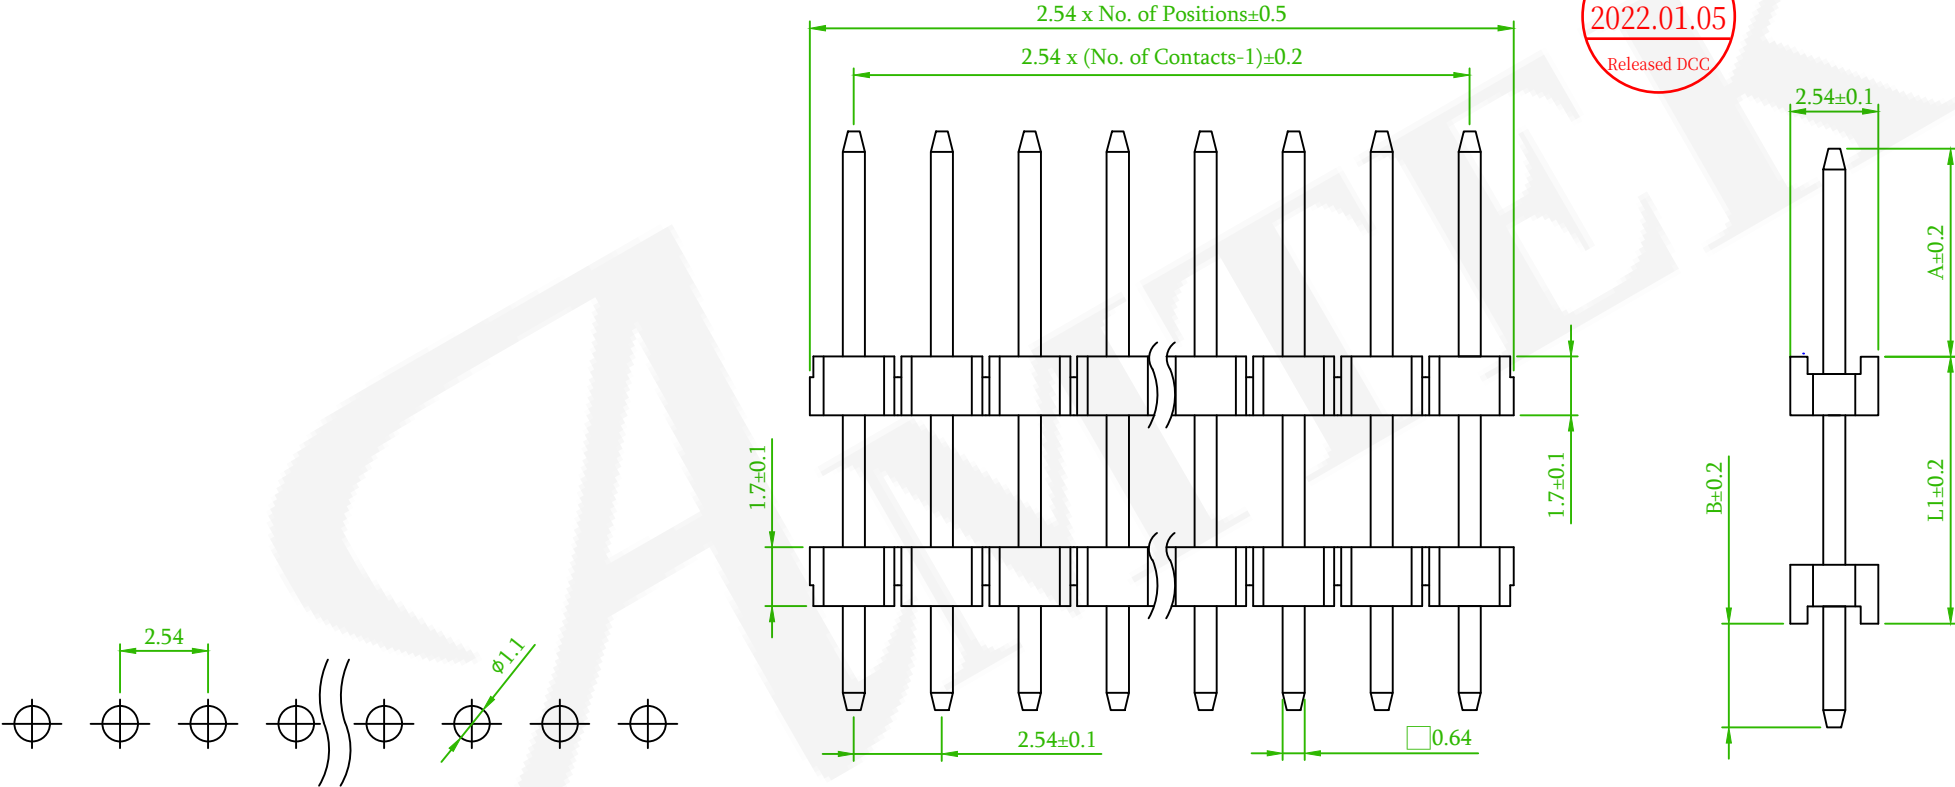

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PH1D17-1XX-U

△ Fx1	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
△ Ex1	ECN No.:210619 Cancel the top view	Alice	2021/09/15
△ D	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm S/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH1DDA17-1XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN016-GA104	版本 REV.	F	核對 CHECKED	Josh 2018/03/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		