

ORDER INFORMATION

Insulator: Nylon 9T, UL94V-0, Black

Contact Pin:Brass 

Diagram illustrating the structure of the alphanumeric code: 5 P H 1 D D A 2 5 - 1 X X X X N N X U - A L 1 B - 0 0

The code is structured as follows:


- 1:Single Row
- No. of contacts Per Row(02~40)
- G0:Gold Flash
- S0:Selective Au
- N:Non Type
- X:Box
- U:RoHS+Hi-Temp.
- A:L1
- B:As Required
- 0:0



AMTEK 糧德

(2021.10.29)

Released DCC

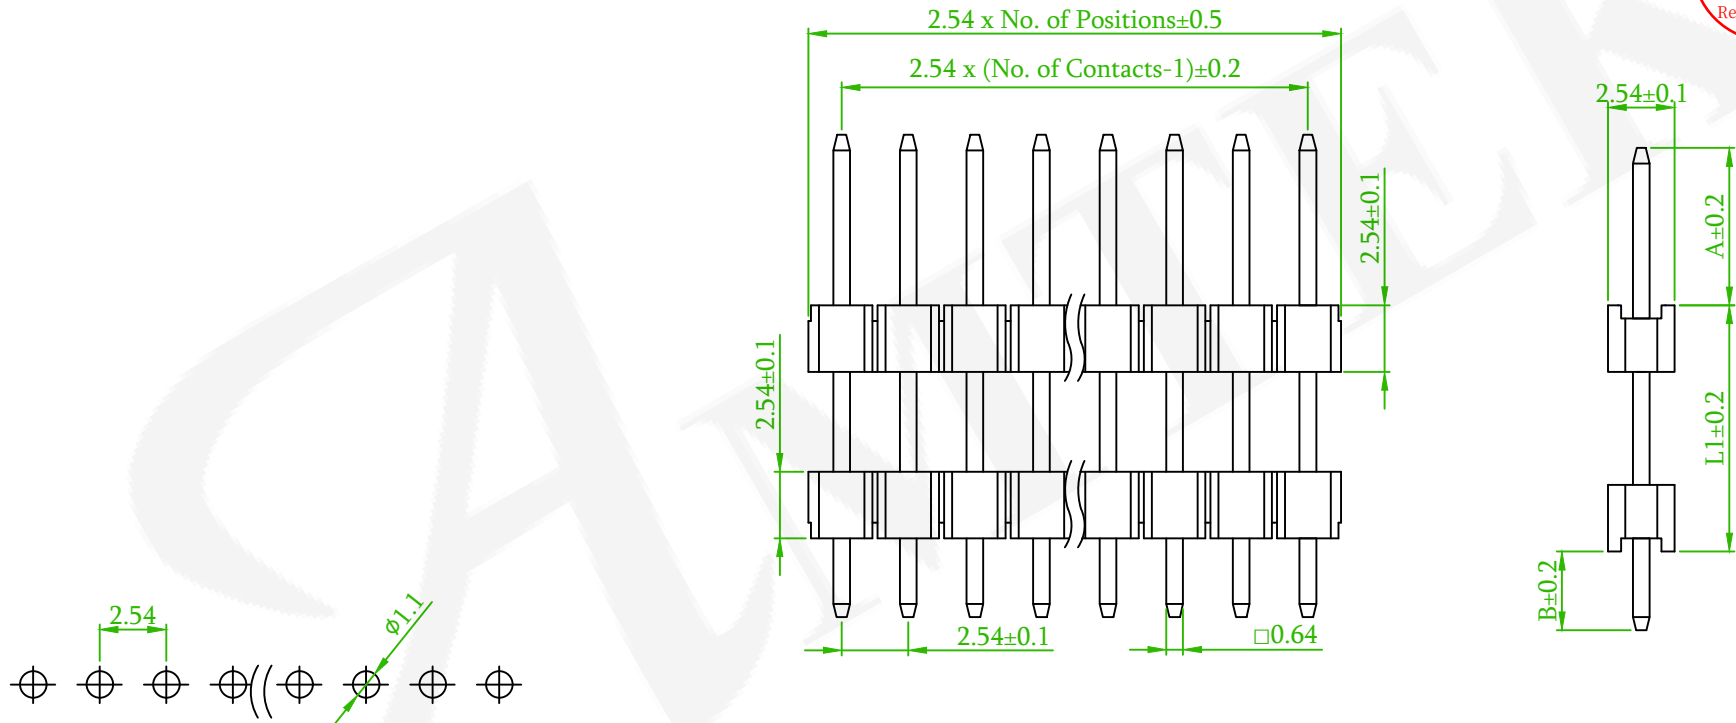

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

Old Part No. :PH1D25-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm S/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PH1DDA25-1XXXXNNXU -XXXXXXXXXX-00			繪圖 DRAWN	Mia 2015/08/17	
	圖號 DRAWING NO.	GN016-GA111	版本 REV.	F	核對 CHECKED	Josh 2018/03/22	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

 x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/04
 x1	ECN No.:210619 Cancel the top view	Alice	2021/09/15
	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE