

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH1DDA25-2XXXXNNXU-A1B-00

2: Dual Row

No. of contacts
Per Row(02~40)

G0: Gold Flash
GA: Au 5u"
GB: Au 10u"
GC: Au 20u"
GD: Au 30u"
TD: Tin Plated
TM: Matte Tin

S0: Selective Au
SA: Selective Au 5u"
SB: Selective Au 10u"
SC: Selective Au 20u"
SD: Selective Au 30u"
TE: Tin 200u"

N: Non Type
N: W/O Peg

X: Box
B: Bag
R: T/R With Cap
(See Table1)
T: Tube W/O Cap

U: RoHS+Hi-Temp.


EX: 060XXX030
A: 6.0
L1: As Required
B: 3.0





NOTE 1

Package For Tape & Reel With CAP:
5PH1DDA25-2XXXXNNRU- XXX XXX XXX-00


DIM.A add DIM.L1 add DIM.Bmm must be less than 23mm.

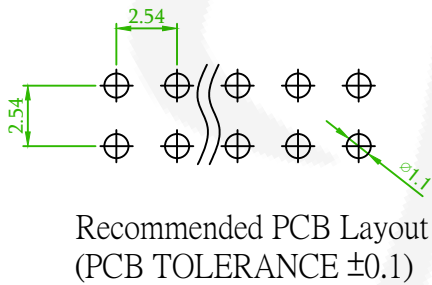

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

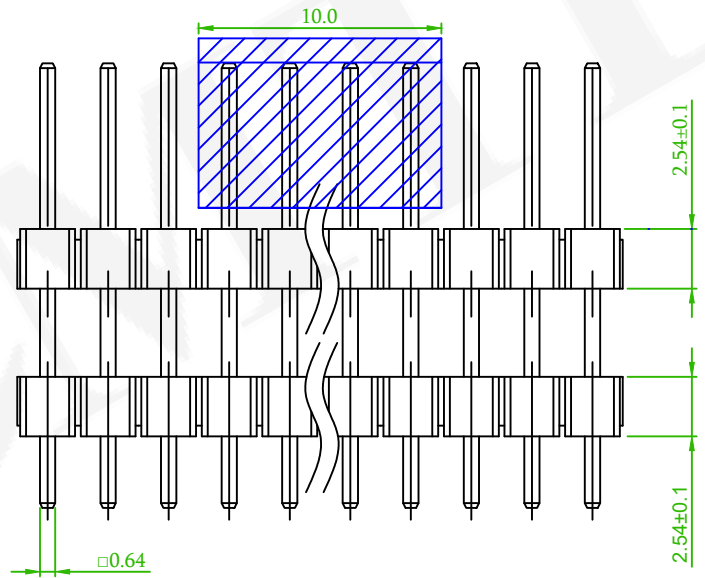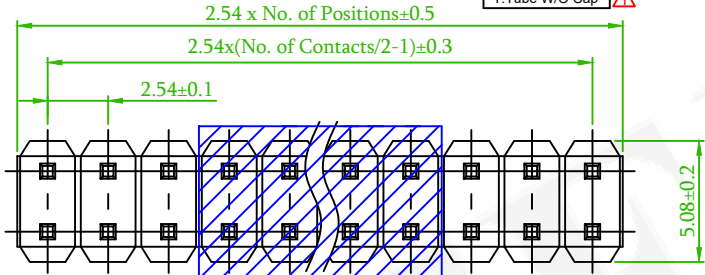

AMTEK 耀德
2022.10.24
Released DCC

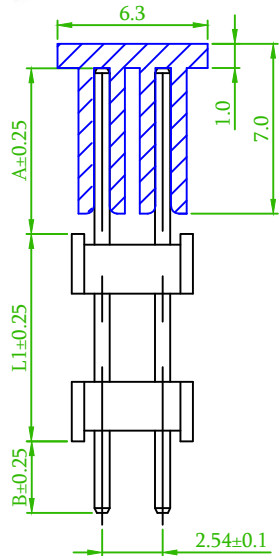

Old Part No. :PH1D25-2XX-U

△x1	Add the package option	Tim	2022/10/24
△x1	Add the TM option	Alice	2021/10/27
△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm D/R V/T DIP TYPE					頁數 Page	1/1
品號 PART NO.	5PH1DDA25-2XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2015/08/17	
圖號 DRAWING NO.	GN016-GA114		版本 REV.	I	核對 CHECKED	Josh 2018/03/22	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION		