

MATERIAL

Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5PH1DMA15-1XX-XX

NXXU-A1LB-00

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

S0:Selective Au

SA:Selective Au 5u"

SB:Selective Au 10u"

SC:Selective Au 20u"

SD:Selective Au 30u"

TE:Tin 200u"

A:A Type
(Odd Pin&Even Pin)

B:B Type
(Only Even Pin)

U:RoHS+Hi-Temp.

EX:060XXX049
A:6.0
L1:As Required
B:4.94

N:W/O Peg


R:T/R With Cap

H:T/R W/O Cap


C:Tube With Cap (5 Pin ↑)

T:Tube W/O Cap (5 Pin ↑)

CAP	L	W	H (Ref.)
> 1 x 4 Pin	10.0	5.0	7.0
≤ 1 x 4 Pin	5.0	4.0	2.6

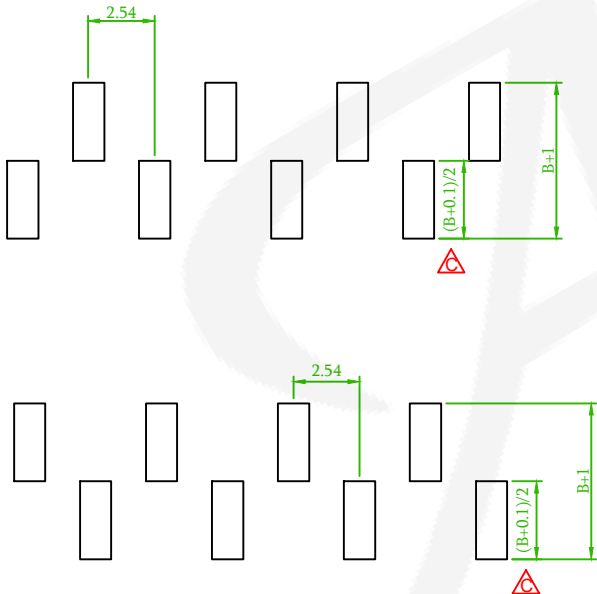

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

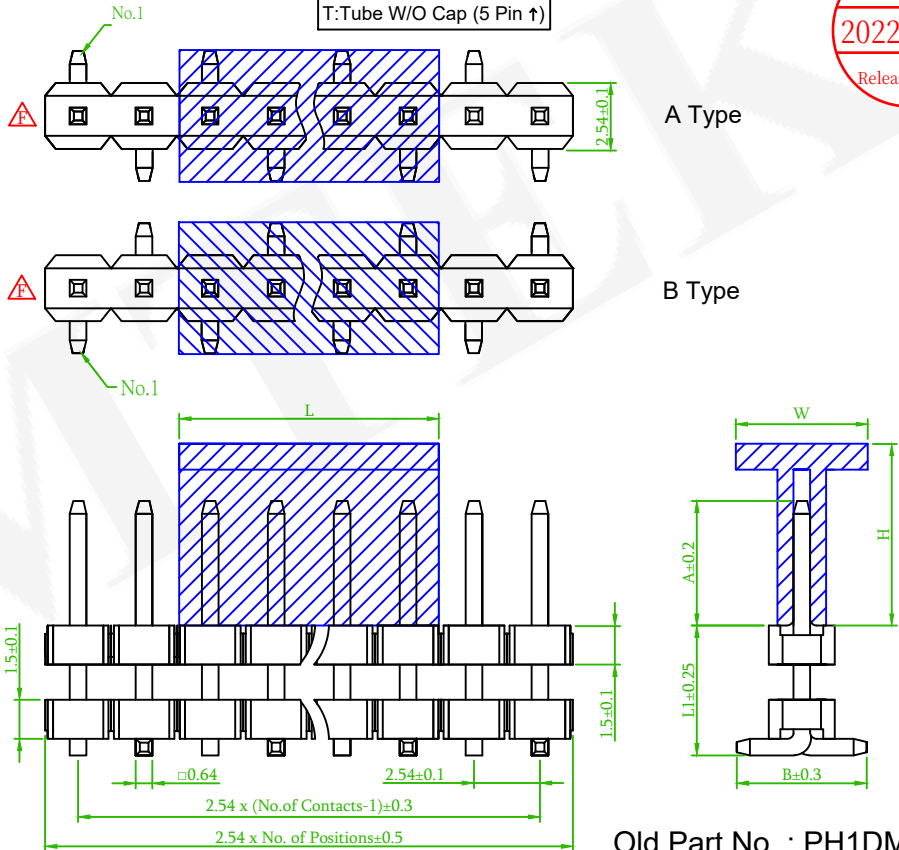

Old Part No. : PH1DM15-1XX-U



AMTEK 耀德
2022.01.05
Released DCC

	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
	ECN No.:210619 Revise the top view	Alice	2021/09/17
	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1DMA15-1XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/14
圖號 DRAWING NO.	GN016-JS005	版本 REV.	G	核對 CHECKED	Johnny 2016/09/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/14	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		