

Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass

5 P H 1 D M A 1 5 - 2 X X X X



```

graph TD
    Root[ ] --- B1[2: Dual Row]
    Root --- B2[No. of contacts Per Row(02-50)]
    Root --- B3[G0: Gold Flash]
    Root --- B4[S0: Selective Au]
    Root --- B5[N: Non Type]
    Root --- B6[U: RoHS+Hi-Temp.]
    Root --- B7[EX: 060XXX075]

    B1 --- B1_1[2: Dual Row]
    B1 --- B1_2[No. of contacts Per Row(02-50)]

    B2 --- B2_1[G0: Gold Flash]
    B2 --- B2_2[S0: Selective Au]

    B3 --- B3_1[GA: Au 5u"]
    B3 --- B3_2[GB: Au 10u"]
    B3 --- B3_3[GC: Au 20u"]
    B3 --- B3_4[GD: Au 30u"]

    B4 --- B4_1[SA: Selective Au 5u"]
    B4 --- B4_2[SB: Selective Au 10u"]
    B4 --- B4_3[SC: Selective Au 20u"]
    B4 --- B4_4[SD: Selective Au 30u"]




    B5 --- B5_1[N: W/O Peg]
    B5 --- B5_2[P: With Peg]

    B6 --- B6_1[R: T/R With Cap]
    B6 --- B6_2[H: T/R W/O Cap]
    B6 --- B6_3[C: Tube With Cap]
    B6 --- B6_4[T: Tube W/O Cap]

    B7 --- B7_1[A: 6.0]
    B7 --- B7_2[L1: As Required]
    B7 --- B7_3[B: 7.48]
  
```



CAP	L	W	H (Ref.)
> 2 x 4 Pin	10.0	6.3	7.0
≤ 2 x 4 Pin	5.08	6.3	7.0

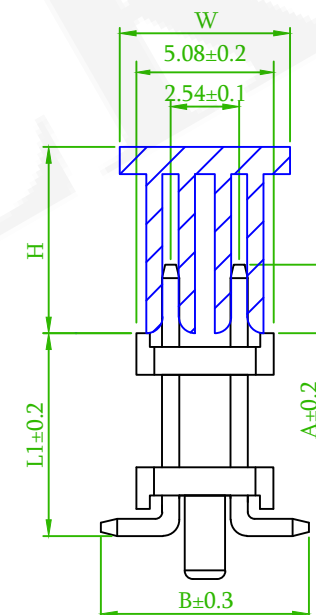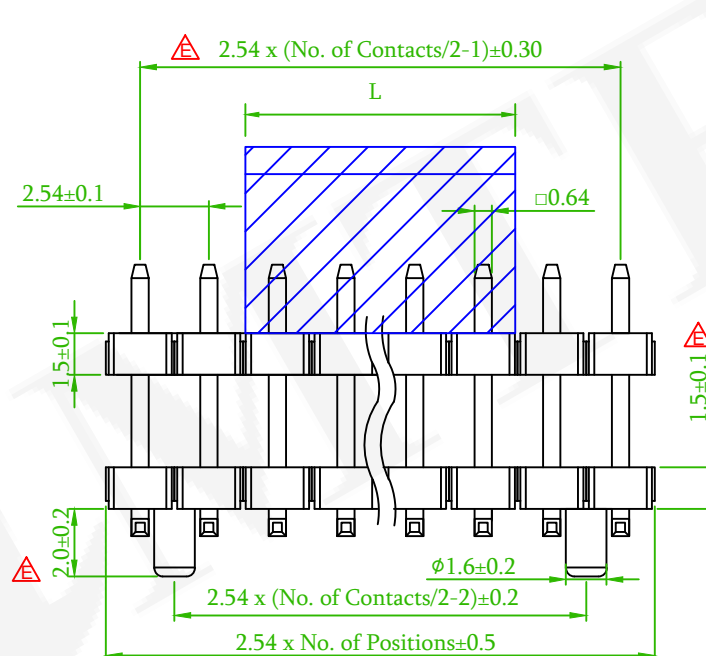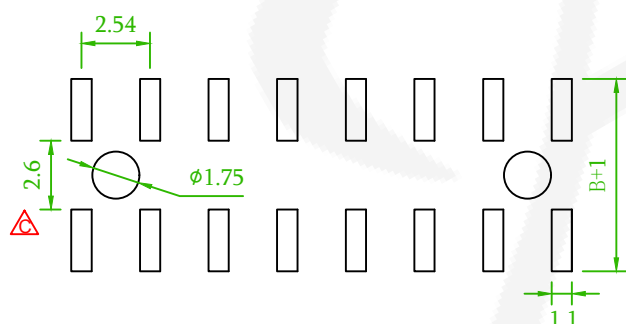

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

Old Part No. : PH1DM15-2XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm					頁數 Page	1/1
	品號 PART NO.	5PH1DMA15-2XXXXXXNXU -XXXXXXXXXX-00					繪圖 DRAWN	Jeff 2016/09/19
	圖號 DRAWING NO.	GN016-GA116		版本 REV.	G	核對 CHECKED	Johnny 2016/09/19	
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION		