

MATERIAL

Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5PH1DMA17-1XX-XX

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash
GA: Au 5u"
GB: Au 10u"
GC: Au 20u"
GD: Au 30u"
T0: Tin Plated

S0:Selective Au
SA: Selective Au 5u"
SB: Selective Au 10u"
SC: Selective Au 20u"
SD: Selective Au 30u"
TE: Tin 200u"

N:W/O Peg

A:A Type
(Odd & Even Pin)
B:B Type
(Only Even Pin)

R:T/R With Cap
C:Tube With Cap
(5 Pin ↑)

U:RoHS+Hi-Temp.


H:T/R W/O Cap
T:Tube W/O Cap
(5 Pin ↑)

EX:060XXX049
A:6.0
L1:As Required
B:4.9



AMTEK 耀德
2022.01.05
Released DCC

CAP	L	W	H (Ref.)
> 1 x 4 Pin	10.0	5.0	7.0
≤ 1 x 4 Pin	5.0	4.0	2.6

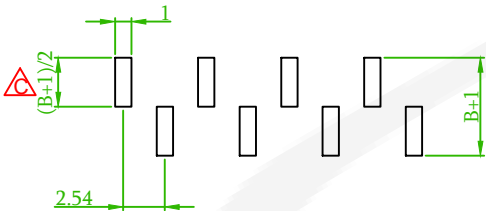


A Type




B Type



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

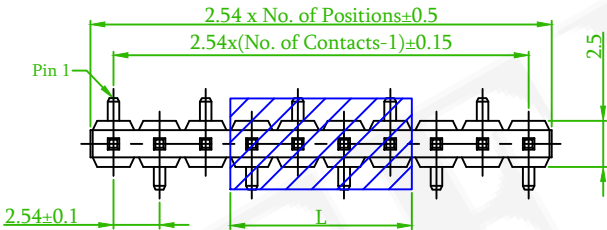

A Type

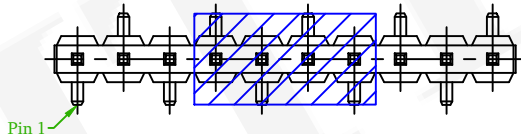

B Type

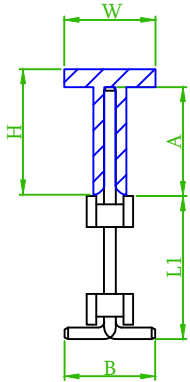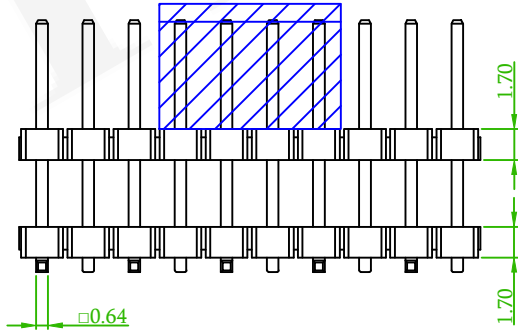

Old P/N : PH1DM17-1XX-U

	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
	ECR NO.:170503. Add annotations.	Gary	2017/06/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1DMA17-1XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Kent 2004/10/04
圖號 DRAWING NO.	GW041-GA031	版本 REV.	F	核對 CHECKED	Paul 2004/10/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2004/10/04	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		