

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black ▲

Contact Pin: Brass ▲

ORDER INFORMATION

5	P	H	1	D	R	A	2	5	-	1	X	X	X	X	N	N	X	U	-	A	L1	B	-	0	0
1:Single Row										No. of contacts Per Row(02~40)		G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" TO: Tin Plated		S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"		N:Non Type N:W/O Peg		U:RoHS+Hi-Temp. X:Box B:Bag C:Tube With Cap		EX:060XXX030 A:6.0 L1:As Required B:3.0					




AMTEK 耀德

2022.09.05

Released DCC



Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

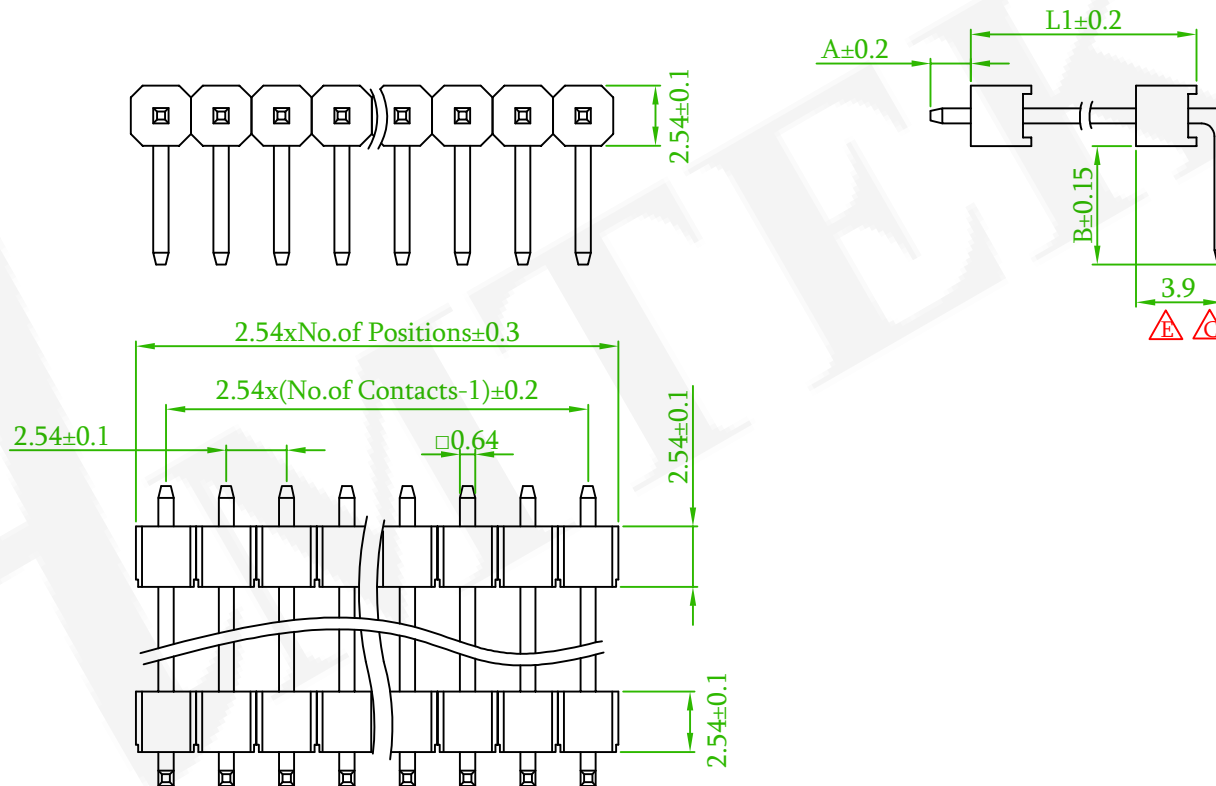

Old Part No. : PH1RDD-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PH1DRA25-1XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/19
	圖號 DRAWING NO.	GN016-GA119	版本 REV.	E	核對 CHECKED	Johnny 2016/09/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

▲ x1	ECN NO.:220801 Revise the drawing	Benson	2022/08/31
▲ x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/05
▲ x1	Revsie the Drawing	Daniel	2019/06/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE