

MATERIAL

Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 D R A 2 5 - 2 X X X X N N X U - A B C - 0 0

2:Dual Row

No. of contacts
Per Row(02~40)

N:W/O Peg

N:Non Type

U:RoHS+Hi-Temp.

EX:060XXX030
A:6.0
L1:As Required
B:3.0

G0:Gold Flash

S0:Selective Au

GA:Au 5u"

SA:Selective Au 5u"

GB:Au 10u"

SB:Selective Au 10u"

GC:Au 20u"

SC:Selective Au 20u"

GD:Au 30u"

SD:Selective Au 30u"

T0:Tin Plated

TE:Tin 200u"

X:Box

B:Bag





C:Tube With Cap



AMTEK 耀德


2022.01.05

Released DCC

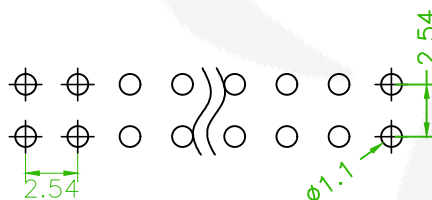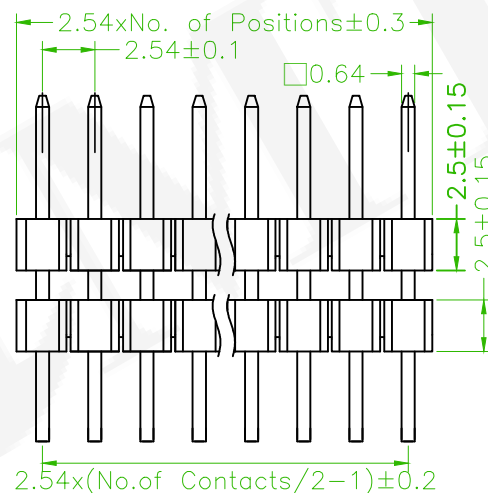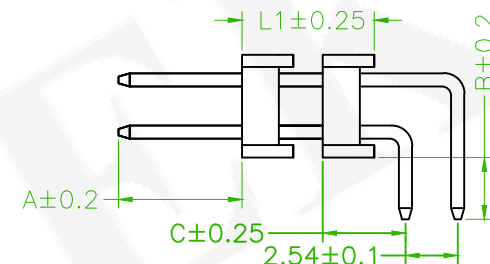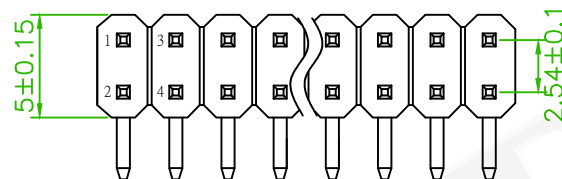

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old P/N : PH1RDD-2XX-U



品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1DRA25-2XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Sinnys 2009/08/04
圖號 DRAWING NO.	GN003-GA034	版本 REV.	C	核對 CHECKED	Paul 2009/08/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/08/04	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
	Modify order information	B	2017/01/26 Gary