
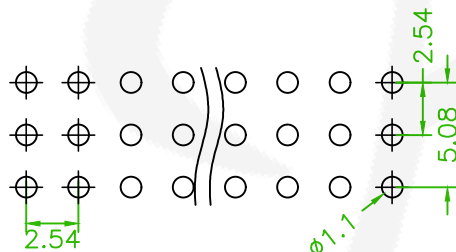
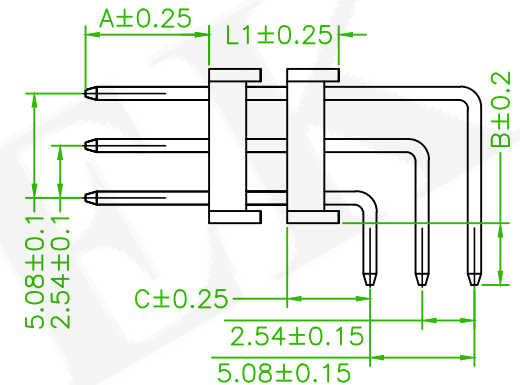


MATERIAL


Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5	P	H	1	D	R	A	2	5	-	3	X	X	X	X	N	N	X	U	-	A	L1	B	-	0	0
3:Triple Row				No. of contacts Per Row(02~40)				G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated				S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"				N:W/O Peg		N:Non Type		U:RoHS+Hi-Temp.		EX:060XXX030 A:6.0 L1:As Required B:3.0			
																		X:Box C:Tube With Cap		B:Bag					

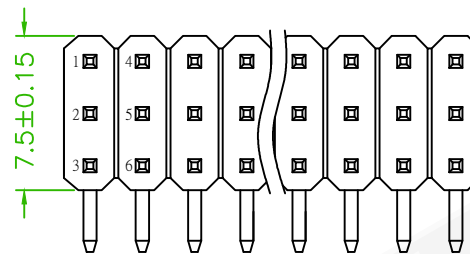

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

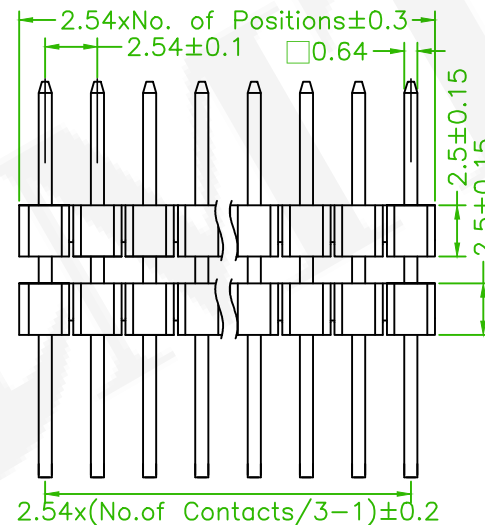

Old P/N : PH1RDD-3XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PH1DRA25-3XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Sinnys 2009/08/04
	圖號 DRAWING NO.	GN003-GA036	版本 REV.	C	核對 CHECKED	Paul 2009/08/04	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/08/04	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
	Modify order information	B	2017/01/26 Gary