



Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass

5 P H 1 D U A 2 5 - 1 X X X X N N X U - A / B / C - X X

	DIM. D
	00:4 00mm

B:7.5
C:3.3

DIM. D
00:4.00mm
01:6.50mm
02:8.50mm
03:17.5mm
04:30.5mm
05:4.60mm
06:4.90mm
07:6.30mm
08:6.80mm
09:3.00mm
10:5.80mm
11:8.30mm

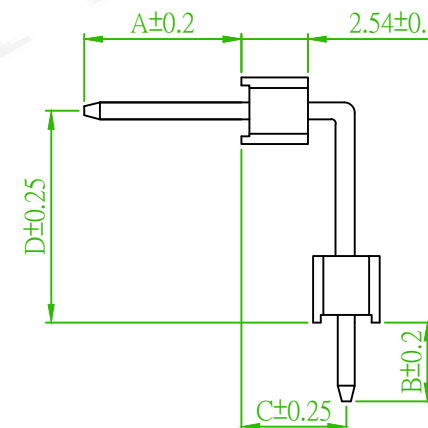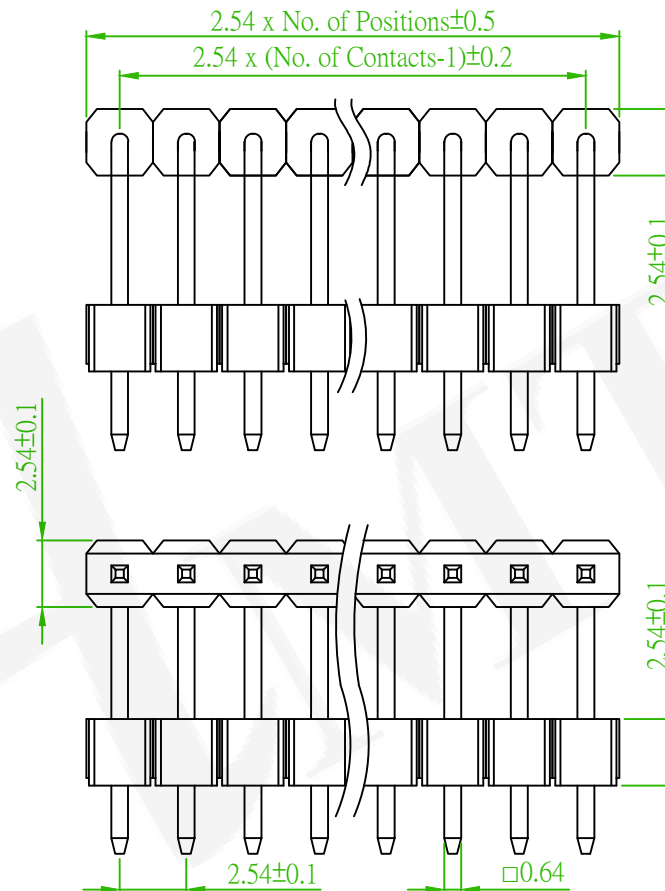

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

Old Part No. : PH1DR-1XX-U

A x1	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
G x1	Add an option: 11: 8.30mm.	Nick	2019/06/27
F x1	Add an option: 10: 5.80mm.	David	2019/06/26
E x1	Add an option: 09: 3.00mm.	Gary	2018/12/24
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm S/R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH1DUA25-1XXXXNXXU -XXXXXXXX-XX			繪圖 DRAWN	Jeff 2016/09/19	
圖號 DRAWING NO.	GN016-GA121	版本 REV.	H	核對 CHECKED	Josh 2018/12/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/24	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		