

MATERIAL

Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 D U A 2 5 - 2 X X X X N N X U - A / B / C - X X




2: Dual Row	No. of contacts Per Row(02~40)	GO: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u" T0: Tin Plated TE: Tin 200u"	SO: Selective Au SA: 5u" SB: 10u" SC: 20u" SD: 30u"	N: W/O Peg	N: Non Type	U: RoHS+Hi-Temp.	X: Box B: Bag C: Tube With Cap	EX: 060075033 A: 6.0 B: 7.5 C: 3.3	Dim D 00: 4.00mm 01: 10.1mm 02: 9.00mm 03: 10.3mm 04: 15.3mm 05: 17.0mm 06: 6.00mm 07: 4.50mm
-------------	-----------------------------------	--	---	------------	-------------	------------------	--------------------------------------	---	---



AMTEK 耀德

2022.01.05

Released DCC

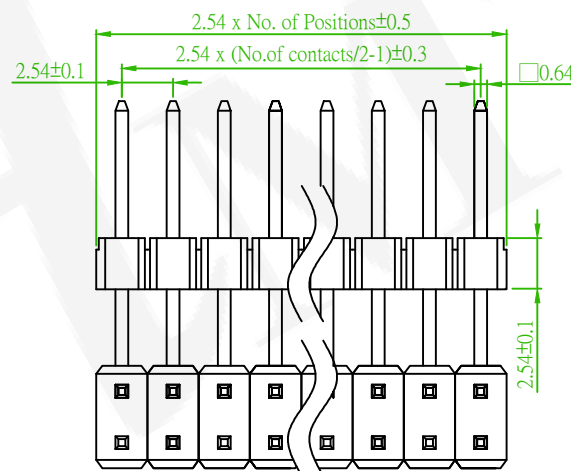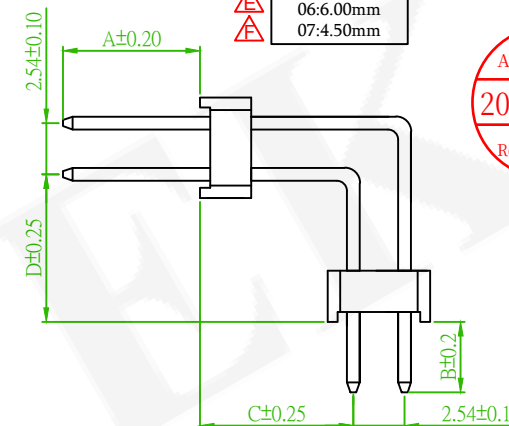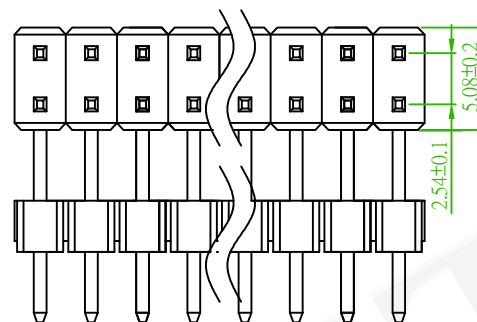

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PH1DR-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm R/A D/R DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PH1DUA25-2XXXXNNXU -XXXXXXXXXX-XX				繪圖 DRAWN	Jeff 2016/09/19
	圖號 DRAWING NO.	GN016-GA122	版本 REV.	G	核對 CHECKED	Josh 2019/03/06	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/03/06	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

	ECN NO.:211018 Revise the drawing	Alice	2021/11/06
	Add the Dim D 4.50mm	David	2020/10/14
	Add the Dim D 6.00mm	Eric	2019/03/06
	Add the Dim D 17.0mm	Mia	2018/09/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE