

MATERIAL B

Insulator:PBT, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION


5 P H 1 F S A 2 5 - 1 X X X X X X X L - XXX046000 - 0 0

1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N:Non Type N:W/O Peg	RoHS B:Bag T:Tube W/O Cap	EX:080046000 A:8.0
--------------	-----------------------------------	--	---	-----------------------------	-------------------------------------	-----------------------



AMTEK 糧德
2023.05.03
Released DCC

Dim A
8.30
10.3
5.80
2.70
6.00

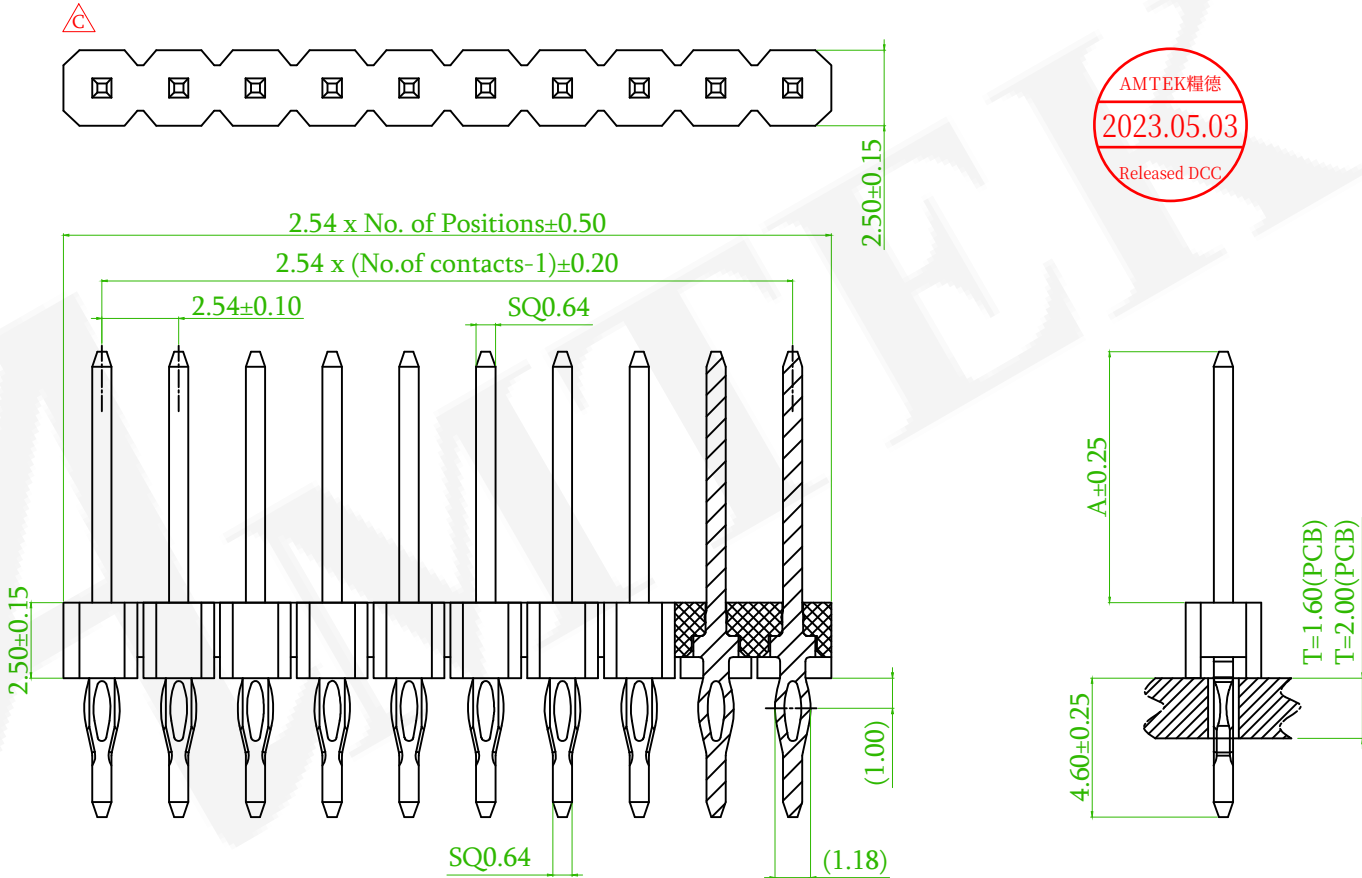

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH1FS25-1XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
C x3	ECN NO.:230406 Revise the drawing	Alice	2023/04/27
B x1	ECN NO.:211018 Revise the drawing	Alice	2021/11/09



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm			頁數 Page	1/1
品號 PART NO.	C 5PH1FSA25-1XXXXXXL -XXX046000-00			繪圖 DRAWN	Mia 2017/06/13
圖號 DRAWING NO.	GN003-MC462	版本 REV.	C	核對 CHECKED	Jerry 2017/06/13
客戶品號 CUSTOMER P/N		比例 SCALE	4 : 1	承認 APPROVED	Jerry 2017/06/13
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION