

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 K S A 1 5 - 1 X X X X N N X U - A B 000 - 0 0

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

X: Box



B: Bag

U: RoHS+Hi-Temp.


EX: 06003000

A: 6.0

B: 3.0

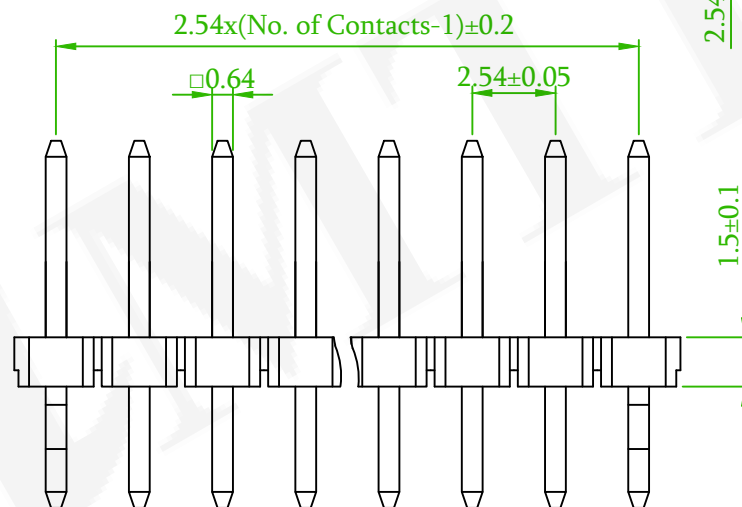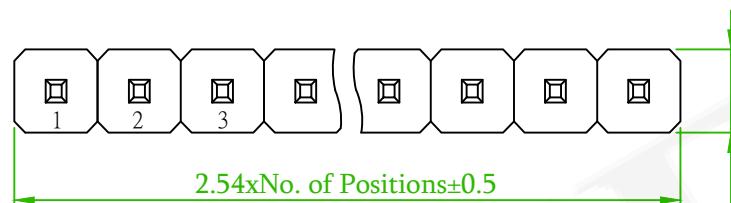

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

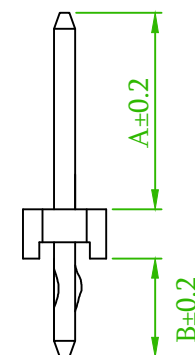

Old Part No. :PH1K15-1XX-U

x1

ECN NO.:211018 Revise the drawing

Alice

2021/11/09



ECN No.:180310,Remove the Cap & Revise the Package option .

Roy

2018/03/22



ECN No.:171201, Revise the Cap.

Roy

2017/12/01

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名
TITLE

PIN HEADER 2.54mm
S/R V/T DIP TYPE

品號
PART NO.

5PH1KSA15-1XXXXNNXU
-XXXXXX000-00

繪圖
DRAWN

頁數
Page

1/1

圖號
DRAWING NO.

GN016-GA124

版本
REV.

E

核對
CHECKED

Josh
2018/03/22

客戶品號
CUSTOMER P/N

比例
SCALE

None

承認
APPROVED

Jason
2018/03/22

公差
TOLERANCE

.X ± 0.38
.XX ± 0.25

單位
UNIT

mm

THIRD
ANGLE
PROJECTION

