

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black

Contact Pin: Brass





ORDER INFORMATION

5 P H 1 K S A 1 5 - 2 X X X X N N X U - A B 000 - 0 0

2: Dual Row	No. of contacts Per Row(01~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type	N: W/O Peg	X: Box C: Tube With Cap	U: RoHS+Hi-Temp.	EX: 060030000 A: 6.0 B: 3.0
-------------	-----------------------------------	---	--	-------------	------------	----------------------------	------------------	-----------------------------------



AMTEK 耀德
2022.01.05
Released DCC

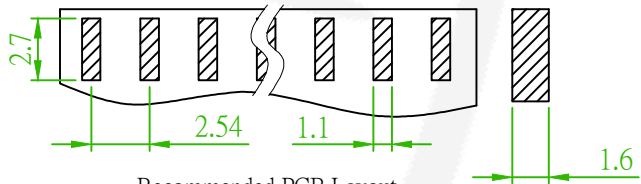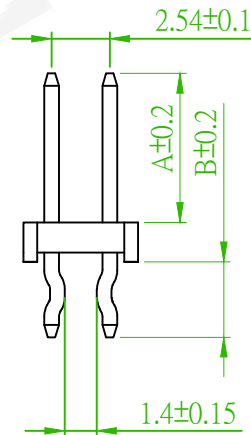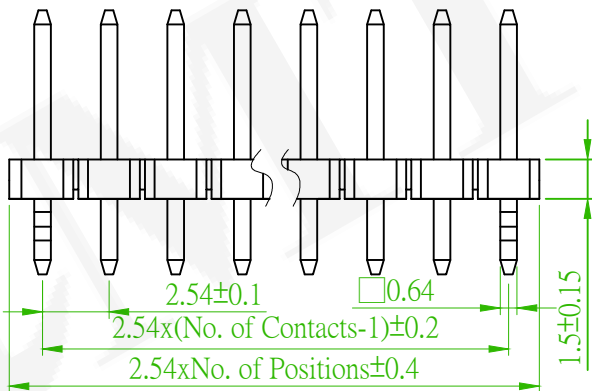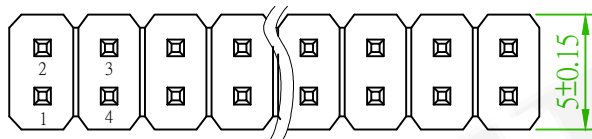

Recommended PCB Layout
(PCB BOARD TOLERANCE±0.1)

Old Part No. :PH1K15-2XX-U

	ECN NO.:211018 Revise the drawing	Alice	2021/11/09
	Modify order information	B	2017/01/26 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1KSA15-2XXXXNNXU -XXXXXX000-00				繪圖 DRAWN	Joe 2010/05/04
圖號 DRAWING NO.	GN003-GA038	版本 REV.	C	核對 CHECKED	Paul 2010/05/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/05/04	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		