

MATERIAL


Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5	P	H	1	K	S	A	2	5	-	1	X	X	X	X	N	N	X	U	-	A	B	000	-	0	0
1:Single Row										No. of contacts Per Row(01~40)		G0:Gold Flash GA:Au 5u" GB:Au 10u" GC:Au 20u" GD:Au 30u" T0:Tin Plated		S0:Selective Au SA:Selective Au 5u" SB:Selective Au 10u" SC:Selective Au 20u" SD:Selective Au 30u" TE:Tin 200u"		N:Non Type N:W/O Peg		U:RoHS +Hi-Temp. X:Box B:Bag		EX:060030000 A:6.0 B:3.0					



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

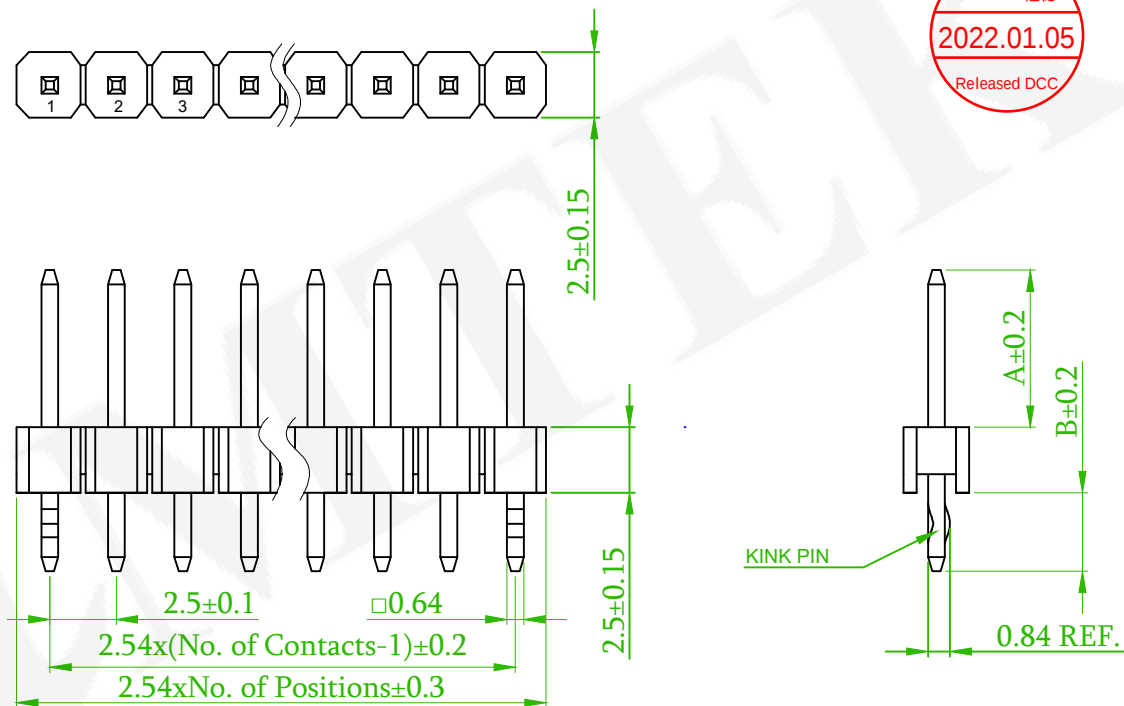

Old Part No. : PH1K25-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm S/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PH1KSA25-1XXXXNXXU -XXXXXX000-00				繪圖 DRAWN	Jeff 2016/09/19
	圖號 DRAWING NO.	GN003-GA192	版本 REV.	E	核對 CHECKED	Josh 2018/03/22	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

	ECN NO.:211018 Revise the drawing	Alice	2021/11/10
	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22
	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE