

MATERIAL


Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH1MRA25-1XXXXXNXU-A000000-00

AMTEK 耀德
2023.10.20
Released DCC

1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N:Non Type	U:RoHS+Hi-Temp.	EX:06000000 A:6.0 (Maximum Dim.A=7.0mm)
				N:W/O Peg P:With Peg (03~40P)	R:T/R With Cap H:T/R W/O Cap C:Tube With Cap T:Tube W/O Cap	

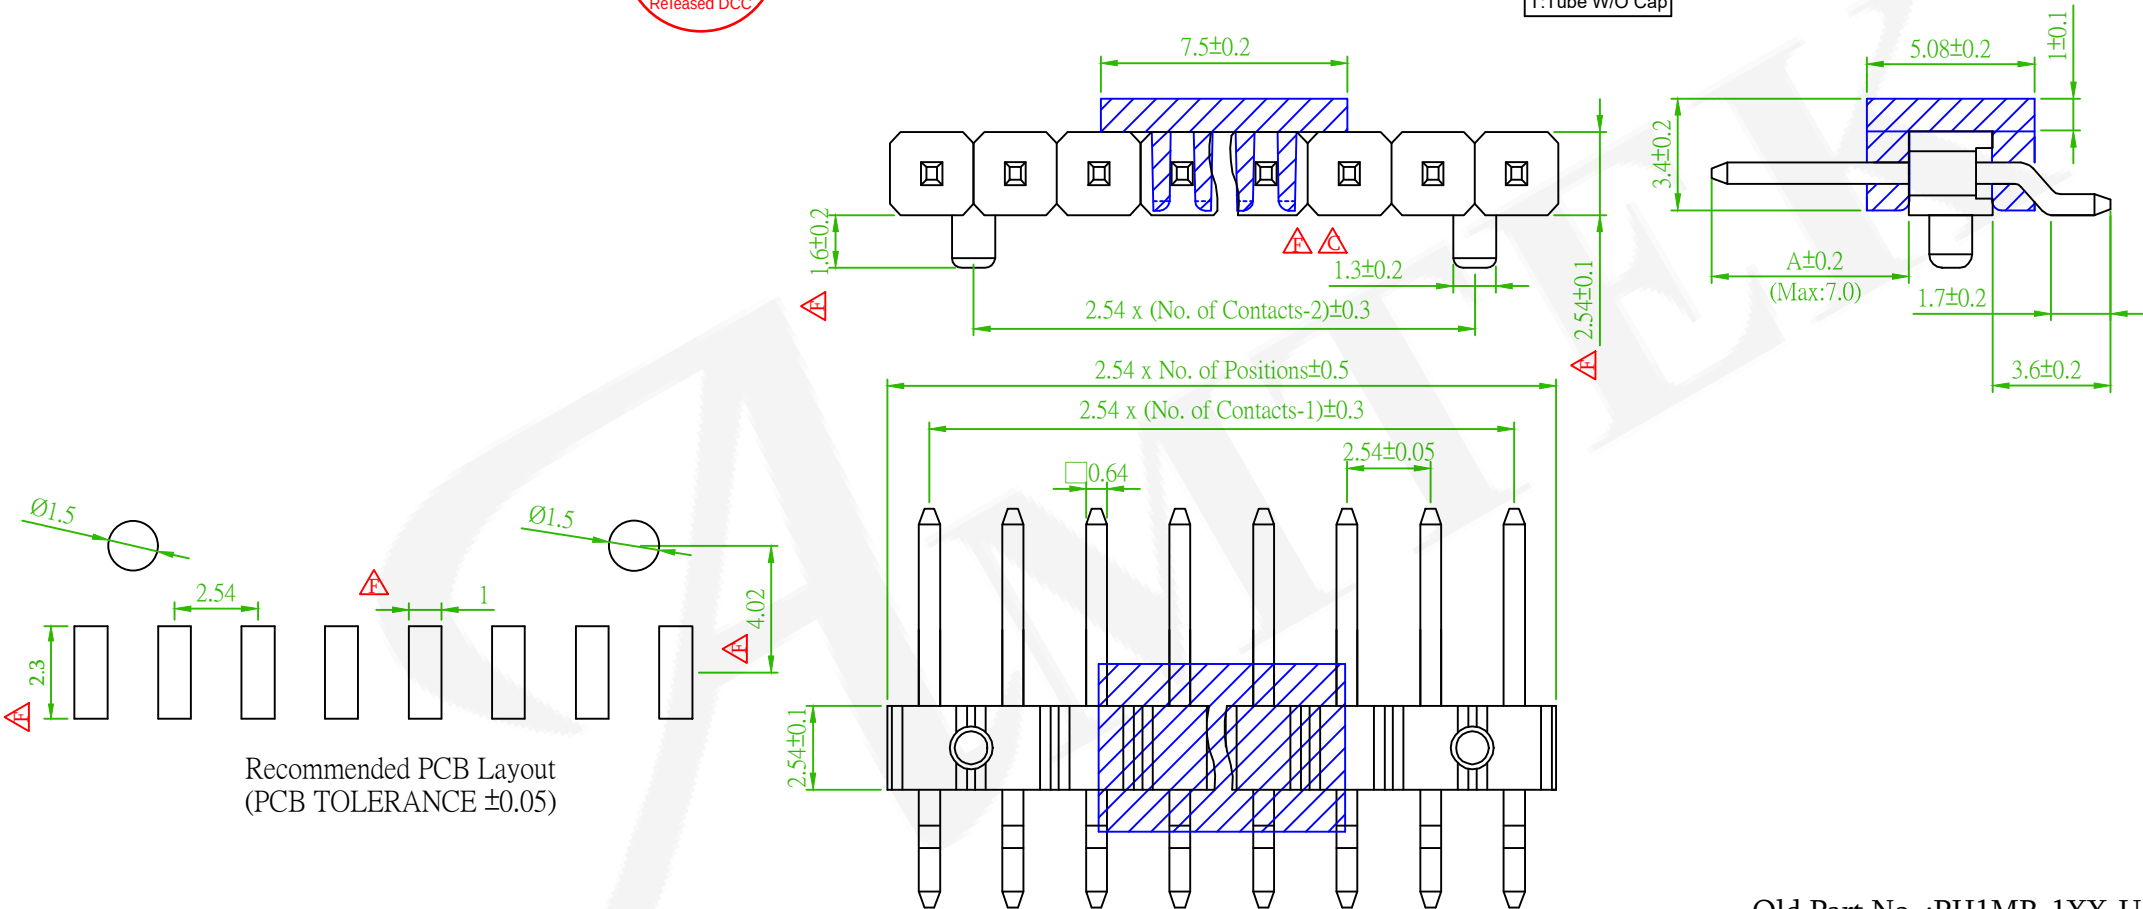

Old Part No. :PH1MR-1XX-U

△x1	ECN NO.:230924 Revise the drawing	David	2023/10/16
△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/05
△x6	ECN NO.:170635 Revised the Drawing	Mia	2017/09/07
△x3	Modify order information	Gary	2017/01/24
△x1	Revised the Order information	Mia	2016/10/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1MRA25-1XXXXXNXU -XXX000000-00				繪圖 DRAWN	Mia 2015/08/18
圖號 DRAWING NO.	GN016-GA130	版本 REV.	H	核對 CHECKED	John 2015/08/18	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/18	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	