

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION





5 P H 1 M R A 2 5 - 2 X X X X N N X U - A 000 000 - 0 0

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS+Hi-Temp.	EX: 060000000 A: 6.0 (Maximum Dim.A=9.0mm)
					R: T/R With Cap H: T/R W/O Cap C: Tube With Cap T: Tube W/O Cap	

AMTEK 糧德

2023.10.20

Released DCC

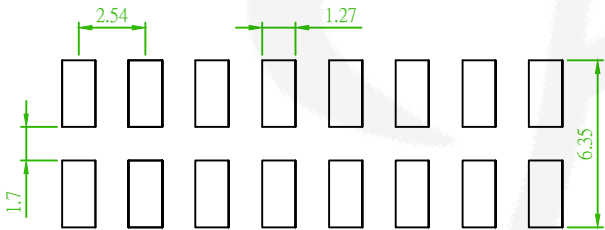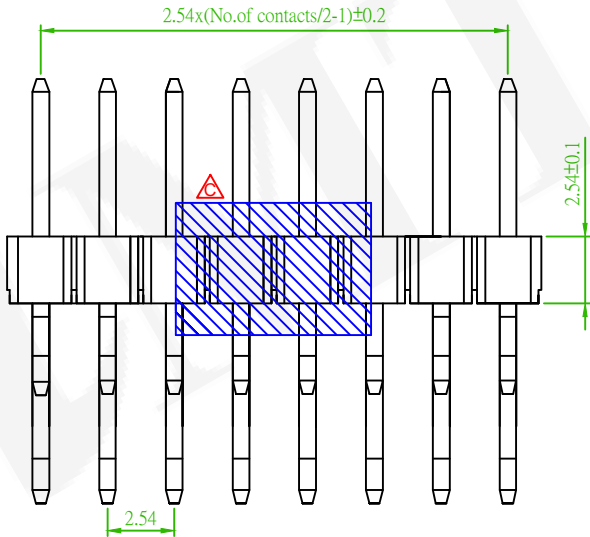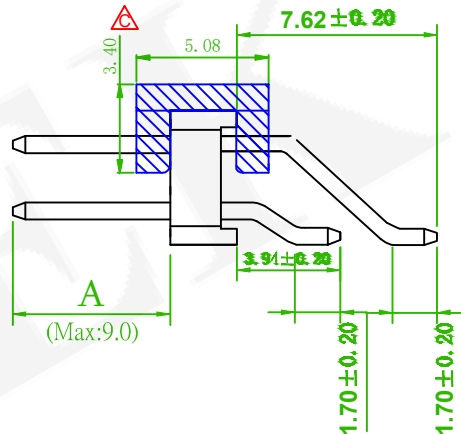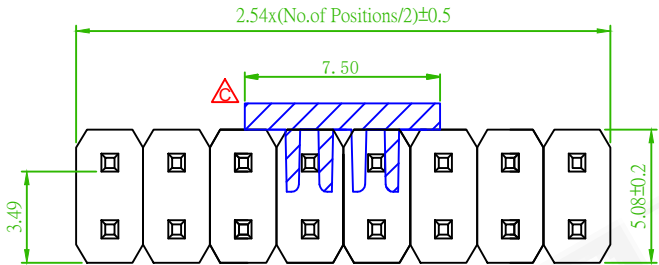

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH1MR-2XX-U

	ECN NO.:230924 Revise the drawing	David	2023/10/16
	ECN NO.:211018 Revise the drawing	Alice	2021/11/10
	ECN NO.:191210,Change: Revise the Cap	David	2019/12/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm PLASTIC HEIGHT 2.5mm SMT STRAIGHT				頁數 Page	1/1
品號 PART NO.	5PH1MRA25-2XXXXNXXU -XXX000000-00				繪圖 DRAWN	Mia 2015/08/19
圖號 DRAWING NO.	GN016-GA131	版本 REV.	E	核對 CHECKED	John 2015/08/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/19	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	