

MATERIAL

Insulator: Nylon 9T, UL 94V-0, Black
Contact Pin: Brass




ORDER INFORMATION

5 P H 1 M S A 1 5 - 2 X X X X X N X U - A B C - 0 0

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg P: With Peg	U: RoHS+Hi-Temp. R: T/R With Cap H: T/R W/O Cap C: Tube With Cap T: Tube W/O Cap	EX: 060075033 A: 6.0 B: 7.5 C: 3.3
-------------	-----------------------------------	---	--	--	--	---



CAP	L	W	H (Ref.)
> 2 x 4 Pin	10.0	6.3	7.0
≤ 2 x 4 Pin	5.08	6.3	7.0

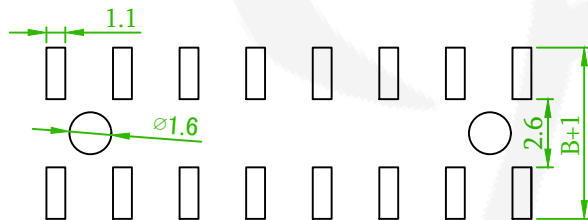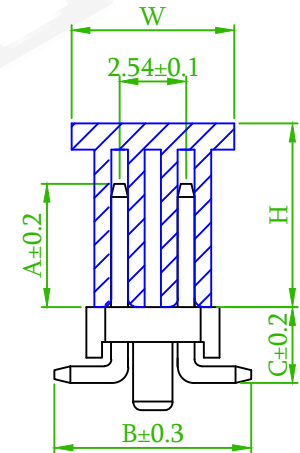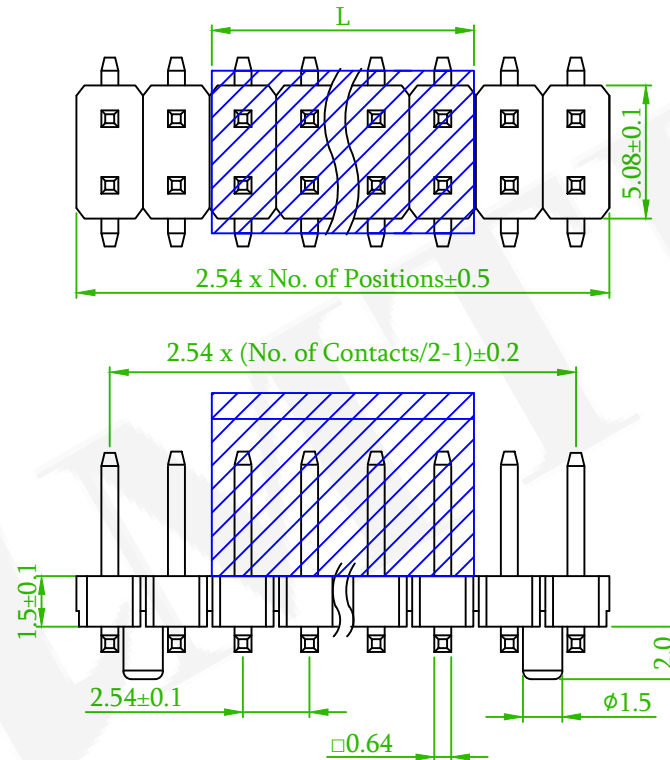

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PH1M15-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PH1MSA15-2XXXXXXNXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2015/08/18
	圖號 DRAWING NO.	GN016-GA133	版本 REV.	D	核對 CHECKED	John 2015/08/18	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/18	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

	ECN NO.:211018 Revise the drawing	Alice	2021/11/11
	ECN No.: 171201, Revise the Cap.	Roy	2017/12/01
	Modify order information	Gary	2017/01/24
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE