

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin : Brass

ORDER INFORMATION


5 P H 1 M S A 1 7 - 2 X X X X N N X U - A B C - 0 0

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS+Hi-Temp.	EX: 060075033 A: 6.0 B: 7.5 C: 3.3
-------------	-----------------------------------	---	--	---------------------------	------------------	---





AMTEK 耀德
2022.01.05
Released DCC


CAP	L	W	H (Ref.)
> 2 x 4 Pin	10.0	6.3	7.0
≤ 2 x 4 Pin	5.08	6.3	7.0

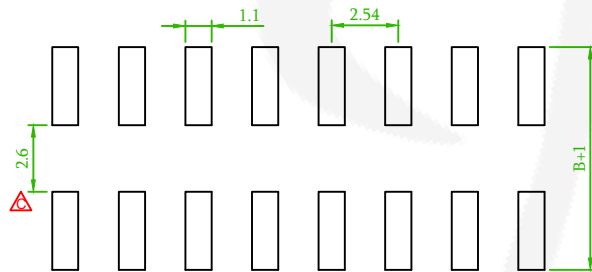

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

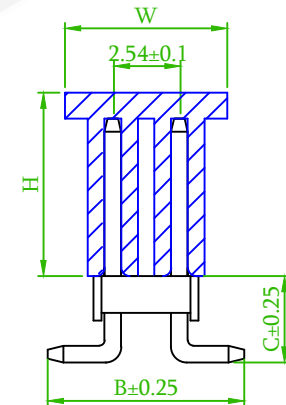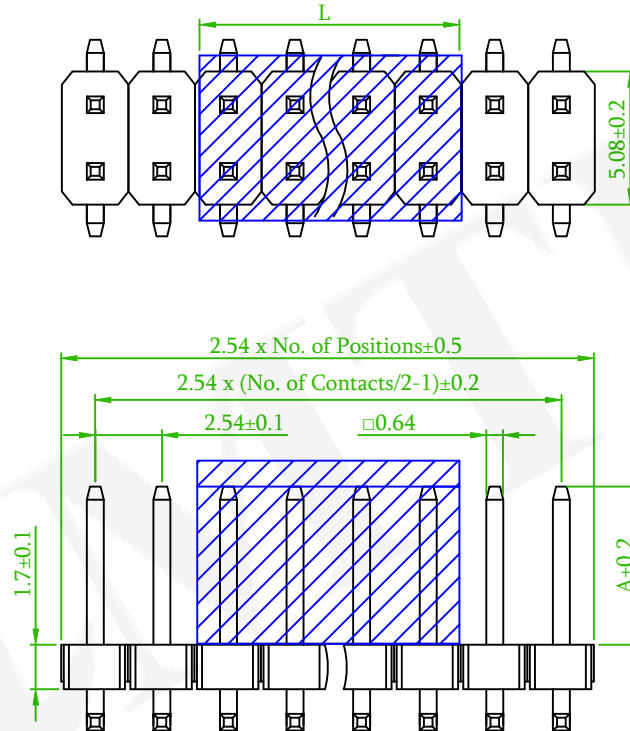

Old Part No. : PH1M17-2XX-U



品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	△ 5PH1MSA17-2XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2015/08/18
圖號 DRAWING NO.	GN016-GA134	版本 REV.	F	核對 CHECKED	John 2015/08/18	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/18	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

△x1	ECN NO.:211018 Revise the drawing	Alice	2021/11/11
△	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
△x2	ECN NO.:170547, removed the peg.	Mia	2017/06/09
△x1	Modify P.C.B Layout	Gary	2017/03/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE