

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 1 M S A 2 5 - 2 X X X X X N X U - A B C - 0 0



2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg P: With Peg	U: RoHS +Hi-Temp. R: T/R With Cap H: T/R W/O Cap C: Tube With Cap T: Tube W/O Cap	EX: 060080033 A: 6.0 B: 8.0 C: 3.3
-------------	-----------------------------------	---	--	--	--	---



CAP	L	W	H (Ref.)
> 2 x 4 Pin	10.0	6.3	7.0
≤ 2 x 4 Pin	5.08	6.3	7.0

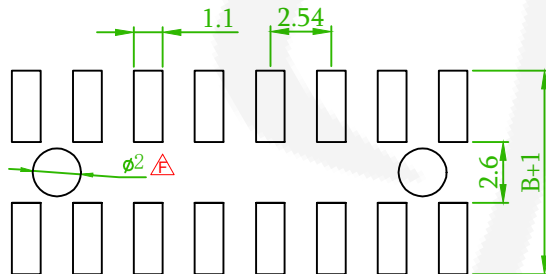


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

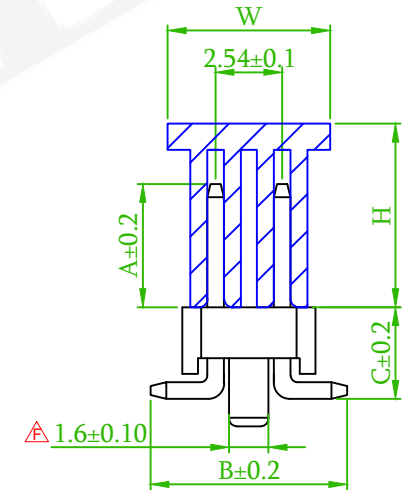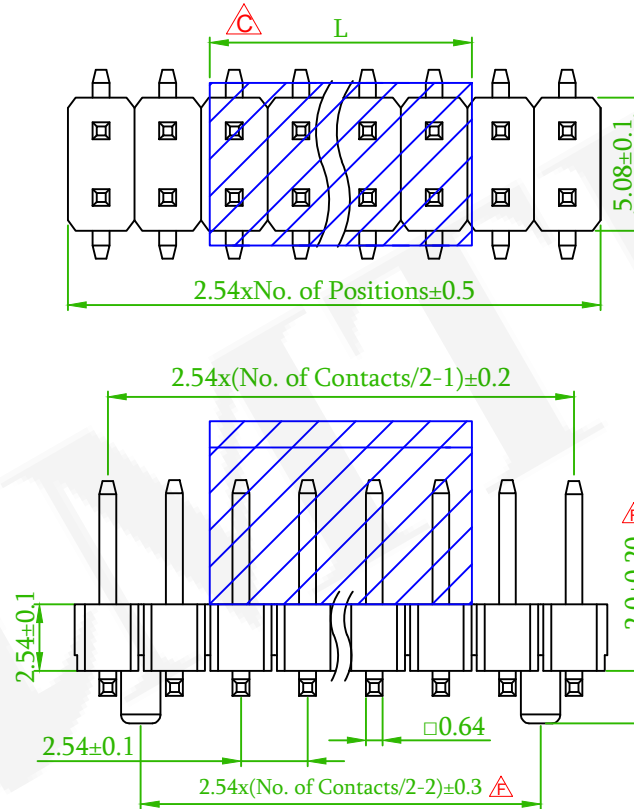

Old Part No. : PH1M25-2XX-U

△x6	Add the Peg	Alice	2023/02/16
△x1	ECN NO.: 210916 Revise the drawing	Alice	2021/11/08
△x1	ECN No.: 171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	△ 5PH1MSA25-2XXXXXXNXU -XXXXXXXXXX-00	繪圖 DRAWN	Mia 2016/12/07			
圖號 DRAWING NO.	GA000-MC120	版本 REV.	F	核對 CHECKED	Jonny 2016/12/07	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/07	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		