

MATERIAL ⚠

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH1RDA15-1XX-XX

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash

GA:5u" Au

GB:10u" Au

GC:20u" Au

GD:30u" Au

T0:Tin Plated

S0:Selective Au

SA:5u" Selective Au

SB:10u" Selective Au

SC:20u" Selective Au

SD:30u" Selective Au

TE:200u" Tin

N:Non Type

N:W/O Peg

X:Box

C:Tube With Cap

U:RoHS+Hi-Temp.

A:6.0


B:3.0

C:3.9

EX:060030039

⚠

AMTEK 耀德
2022.01.05
Released DCC

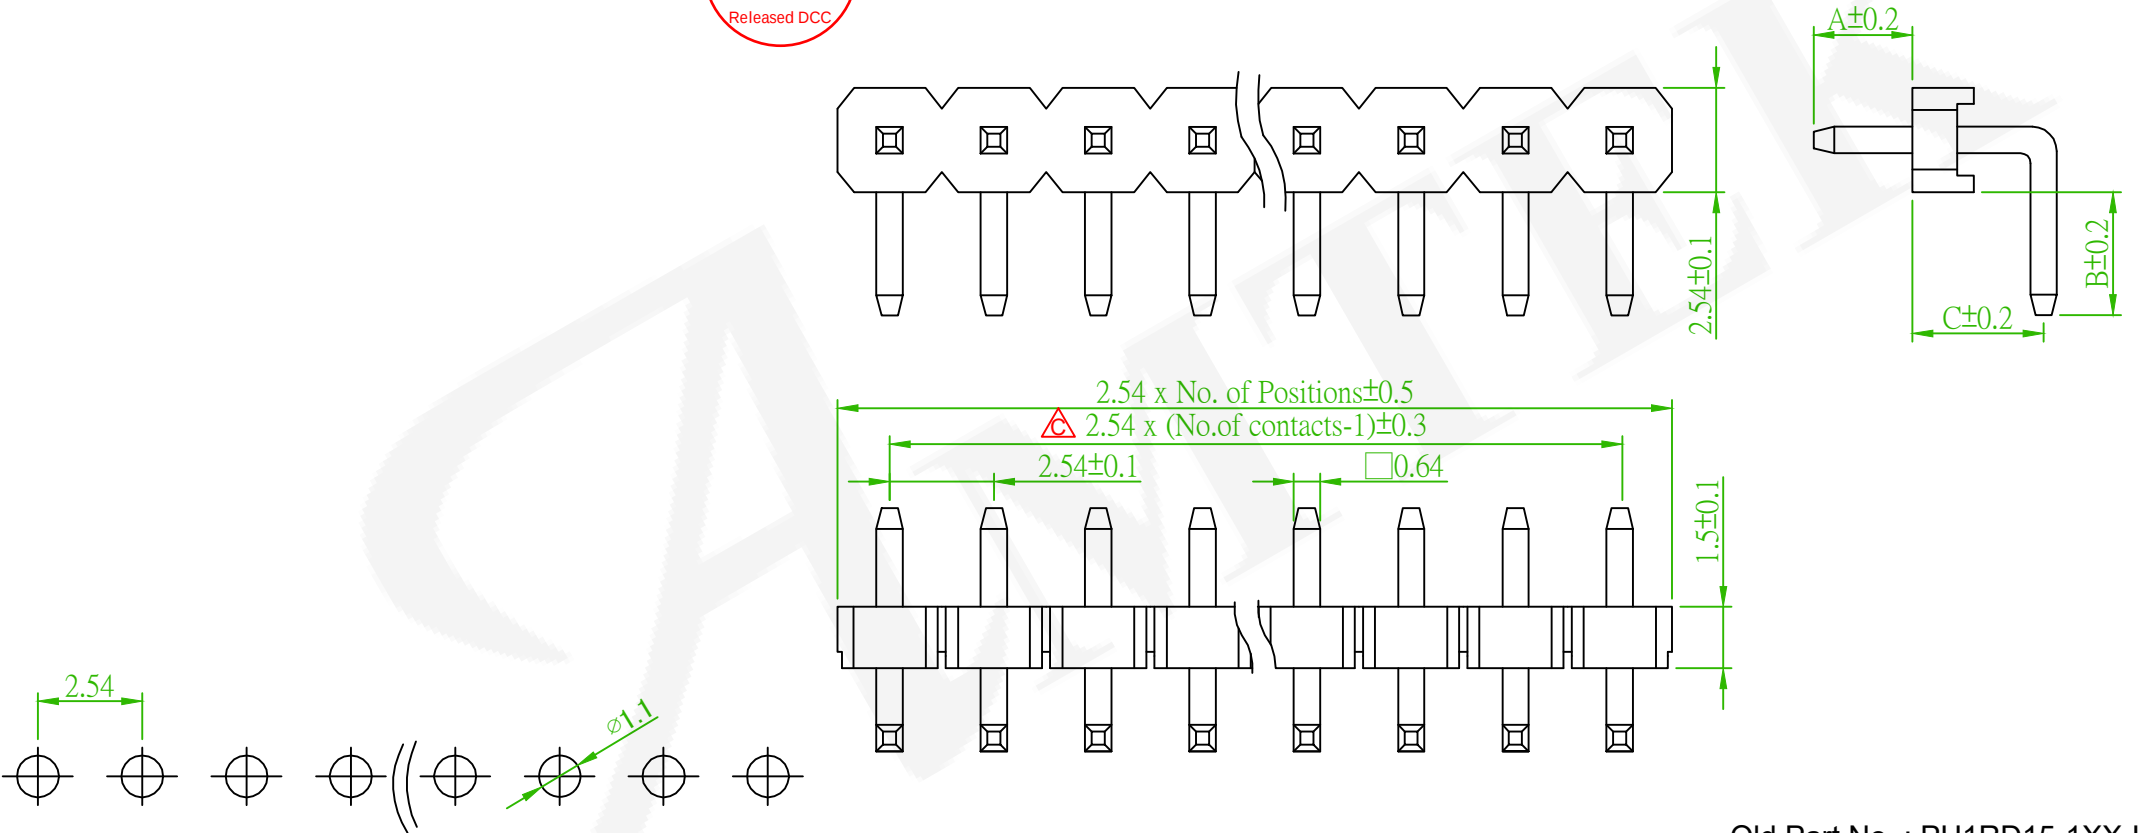

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH1RD15-1XX-U

⚠x1	ECN NO.:211018 Revise the drawing	Alice	2021/11/15
⚠x1	ECN NO.:210635 Revise the Drawing	Benson	2021/06/30
⚠x3	Modify order information	Gary	2017/01/24
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1RDA15-1XXXXNXXU -XXXXXXXXXX -00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN016-GA136	版本 REV.	D	核對 CHECKED	Johnny 2016/09/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		