

MATERIAL





Insulator: Nylon 9T, UL94V-0, Black △

Contact Pin: Brass △

ORDER INFORMATION

5 P H 1 R D A 1 5 - 2 X X X X N N X U - A B C - 0 0

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS+Hi-Temp.	X: Box C: Tube With Cap	B: Bag	EX: 060030039 A: 6.0 B: 3.0 C: 3.9
-------------	-----------------------------------	---	--	---------------------------	------------------	----------------------------	--------	---

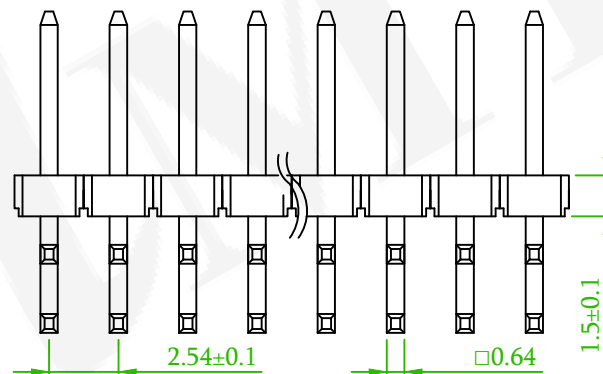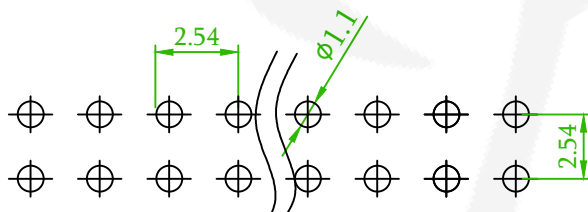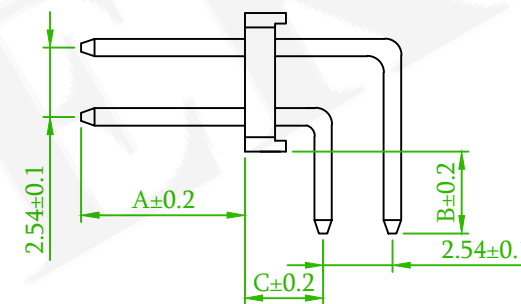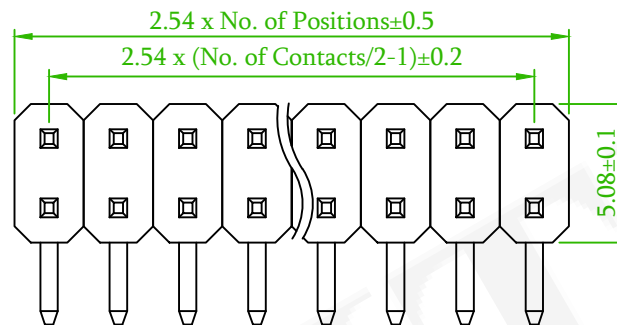

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PH1RD15-2XX-U

△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/20
△	Modify order informatin	B	2017/01/24 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1RDA15-2XXXXNXXU -XXXXXXXXX -00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN016-JS007	版本 REV.	C	核對 CHECKED	Johnny 2016/09/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		