


MATERIAL ⚠

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 R D A 1 7 - 1 X X X X N N X U - A B C - 0 0

1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	X: Box C: Tube With Cap	U: RoHS+Hi-Temp.	EX:060030039 A:6.0 B:3.0 C:3.9
--------------	-----------------------------------	--	--	---------------------------	----------------------------	------------------	---

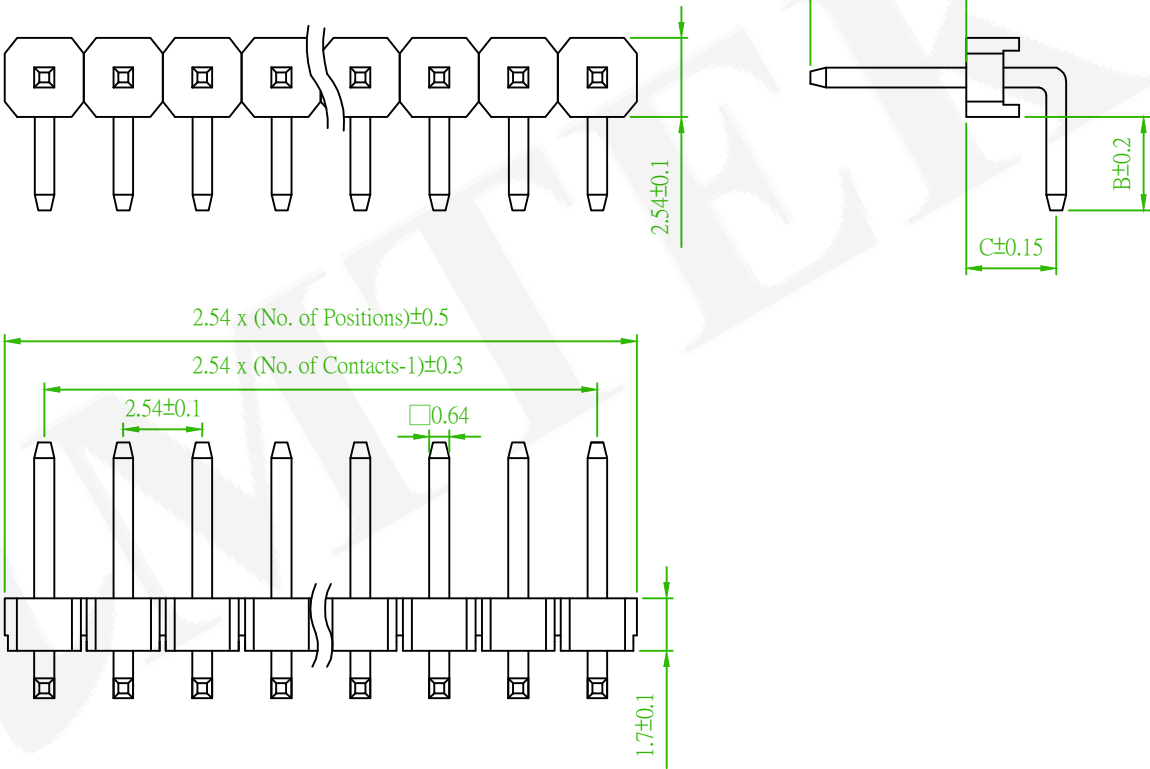

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. :PH1RD17-1XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
⚠x1	ECN NO.:211018 Revise the drawing	Alice	2021/11/15
⚠	Modify order information	B	2017/01/25 Gary



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1RDA17-1XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Joey 2016/08/17
圖號 DRAWING NO.	GN016-GA139	版本 REV.	C	核對 CHECKED	Boris 2016/08/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/17	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	