

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5

P

H

1

R

D

A

1

7

-

2

X

X

X

X

N

N

X

U

-

A

B

C

-

0

0

2: Dual Row

No. of contacts
Per Row(02~40)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

U: RoHS

X: Box

C: Tube With Cap





B: Bag

EX: 060030039

A: 6.0

B: 3.0

C: 3.9

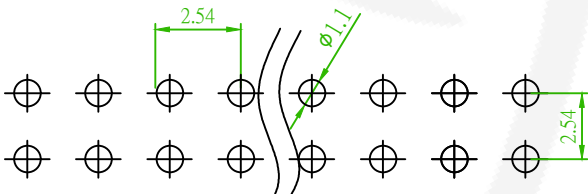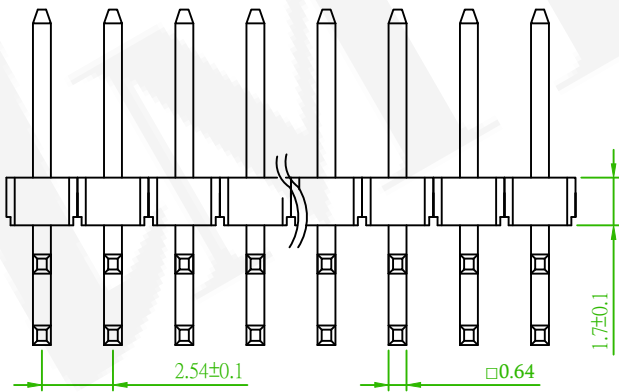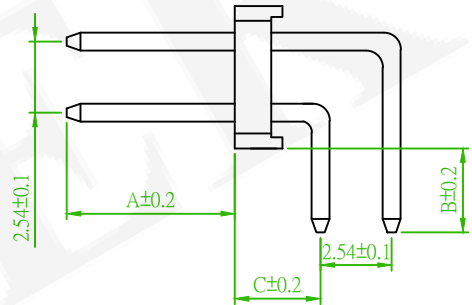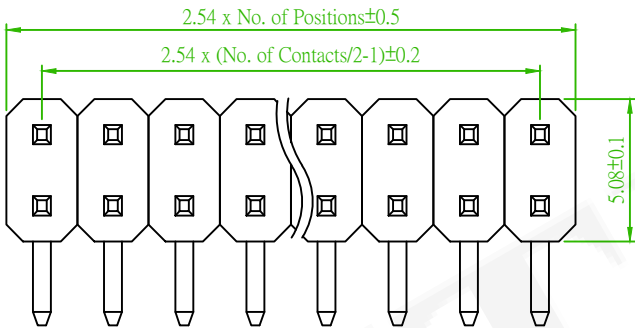

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No.: PH1RD17-2XX-U

ECN NO.: 210916	Revise the drawing	Alice	2021/10/20
Modify order information		B	2017/01/25 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1RDA17-2XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2016/11/10
圖號 DRAWING NO.	GN046-MC040	版本 REV.	C	核對 CHECKED	Jonny 2016/11/10	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/10	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	